

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { B. Walnut	15	N 62° E east (magnetic variation)	74 1/2	R { Center of road			
Mulberry Post		N 2 1/2° E	36	B. Walnut	9	N 46° W	35
B		Sandstone set at 1/4 corner		B. Walnut	1 1/2	N 65° E	68 1/2
C { Ash	6	S. 23 1/2° East	18 1/2	S { B. Walnut	4	S 58° W	15
B. Oak	24	N 4 1/2° E	78	Stone set in road in Newville			
D		stone set at 1/4 corner		T { stone set			
E set		lime-stone witnessed by two sandstones		U { Stone set and witnessed by + set			
F Old sandstone set at 1/4 corner				in solid stones in the ground			
G set corner stone with cross, witnessed by two sandstones marked W. S. 12 1/2				One N 70° W 23 links another N 64° 23			
H Stone by former surveyor				V stone set 10 rods north of corner			
I { B. Walnut	17	S 79 1/2° E	38 1/2	W { Corner at cut in a solid stone in the			
Hickory	8	N 34 1/2° E	30 1/2	ground and witnessed by			
K { Stone set				Hickory 12	536 W		47
L { Set stone from government witness bearing makes							
W. Walnut	2 1/2	N 46° W	4				
W. Walnut	2 1/2	N 86° E (magnetic variation)	7 1/2				
M { set sand stone + set and witnessed by							
two sand stones marked W. S. 5 links							
north & south of corner stone							
O { Stone set and + set							
Sassafras	6	N 75° E	30 1/3				
P { Stone set							
Q { Ash	6	N 45° E	38				
Sycamore	15	N 81° W	67 1/2				



April 18  
1904

I Quincy Short do solemnly swear to support the constitution of the United States and the constitution of the State of Indiana and to faithfully and impartially discharge my duty as deputy surveyor in the Joe W Sullivan survey in and adjoining section (15) Town (7) range (2) west in Monroe Co in the state of Indiana according to law to the best of my skill and ability so help me God.

April 18  
1904

Quincy Short  
This is to certify that I This day appoint Quincy Short a true and lawful deputy surveyor in the foregoing survey in the County of Monroe State of Indiana

B. M. Bowers

April 18  
1904

All parties having been duly notified according to law and all helpers having been duly qualified we proceeded to survey the above said section 15. We ran from a stone at A north one and one half miles and corrected back to E. Thence we ran east to a stone set by a former surveyor  $\frac{3}{4}$  of a mile, <sup>to H</sup> correcting by this we at the corner at I then we went to a stone  $\frac{1}{2}$  of a mile north of I and ran south a mile and a quarter to R not finding any monuments after measuring the south line we corrected the west line setting stones at the places marked on opposite page. Finding the stumps of the old government witness trees at L with the marks in both of them we ran west to C and corrected back.

April 20  
1904

We run the line K D and corrected back setting corners as shown on the field notes. Then we run the line S M to R and established the half mile post at R then we established a corner at Y 22 rods east of H and one at Z 47 rods south of Y. We then run the east and south line of the sec. and at the point of intersection set a corner at Q. Chainmen and } William Butcher  
Flagmen { Jacob Kerk  
A. S. Puffale  
Joseph Sullivan  
J. W. Crane  
E. A. Smith } sworn in by agreement of all parties concerned.

Survey called by Joseph Sullivan

Quincy Short Surveyor Dep.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
Nf Sassafras	18	S 27° W	21	E S Beech	14	S 19°	E 14
B. walnut	16	N	33	Mulberry	5	N 61°	E 17
Nf W. walnut	12	S 65°	E 66½	Nf Elm	10	S 13°	W 72
Beech	18	S 5°	W 28	W Beech	7	N 49°	W 41½



# Matthew Butcher Survey

May 3  
1904


By agreement of interested parties I met at a pointed time and place and proceeded to make the following survey as per plat and notes, I had for assistants John Scott John O Butcher chainmen John E Butcher flagbearer all sworn I hereby certify the foregoing to be a true and correct report of the survey made by me on above date as I verily believe. In witness whereof I attach my hand and seal

L. M. Bowers.

Bearings	Distances in Ch.
19°	E 14
+ 61°	E 17
13°	W 72
+ 49°	W 41



Survey of Section 10 T. 7 R. 1 W

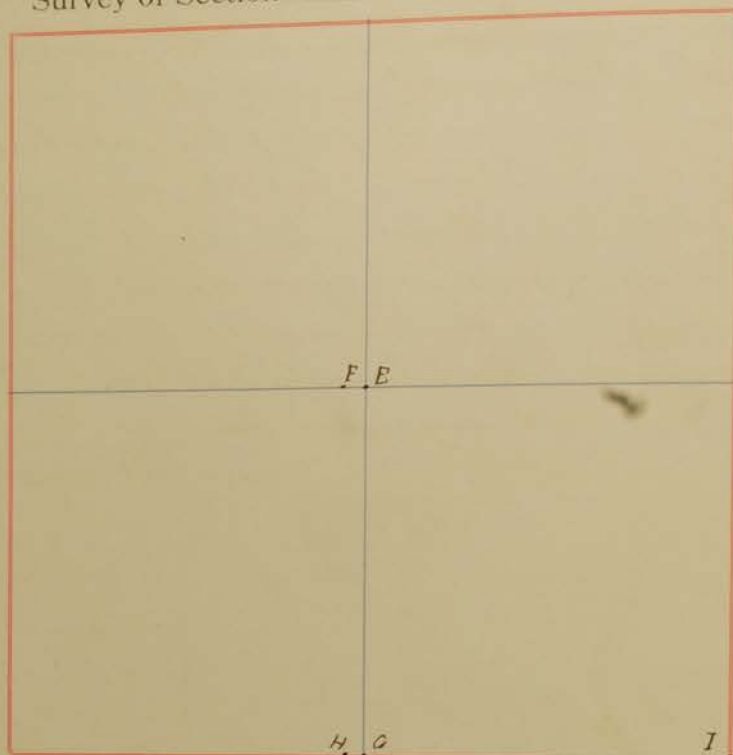

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
E { Stone		S 66°	W 14½	G { Ash	14	N 81°	W 26½
Sug	10	N 36½	E 116½	Sug	4	N 76½	E 29½
H is 3 rds W of E				H is 3 rds W of S ½ mp			
F { Stone		S 88°	W 20	H { Ash	14	N 80°	E 41
Stone		N 87°	E 20	Sug	2	N 14°	E 68½
I { Walnut	7	N 78°	E 48				
" "	12	N 8°	W 103				

# John Scott Survey

May 6  
1904

By agreement I met interested parties at appointed time and place and proceeded to make the following survey as per plat and notes, I had for assistants Lee Stein David Burkett chainmen William Stawkins flagbearer all duly qualified I hereby certify the foregoing to be a true and correct report of the survey made by me as I verily believe. In witness whereof I attach my hand and seal

C. M. Bowers

at 81' 00.00  
at 76 1/2' 00.00  
at 80' 00.00  
at 14' 00.00



Witness Trees	Inches in Diameter	Bearings	Distances in Links
F/Woak	6	S 73½° W	13
" "	4	S 26½° W	2½

May 16 1964  
given  
and  
James  
Hag  
fellow  
people  
I have  
and  
as I  
think

S. S. Wray

May 16  
1904

A written ten days notice having been given I met at appointed time and place and organized by qualifying David Shields James Stager chainmen and Fred Shields flagbearer we then proceeded to make the following survey as per plat and notes perpetuated the center by marking new witnesses I hereby certify the foregoing to be a true and correct report of survey as made by me as I verily believe. In witness whereof I attach my hand and seal

L. M. Bowers



Witness Trees	Inches in Diameter	Bearings	Distances in Links
A Beech	24	N 89° W	42
{ Sug	7	S 1½° E	32
Persimmon	2½	S 16° E	17
{ Oak	6	S 58½° E	39

Aug 18 Legal and  
1914 public Com  
and young  
William  
-propose  
proving  
of the sea  
beats I  
hand and

Laura Kirk

Aug 18  
1904

Legal notice having been given to interested parties I met at appointed time and place and organized by qualifying James Kirk William Stultz chainmen Commodore Ferguson flag bearer. I hereby certify the foregoing to be a true and correct report of the survey as made by me as I verily believe. In witness whereof I attach my hand and seal

C. M. Bowers.



Survey of Section 12 T. 7 R. 2 W

## FIELD NOTES.

FIELD NOTES.							
Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
R Sugar	18	N 58° E	50½				

Brassfield & Wright


7

Aug 18  
1904

By agreement I met the interested parties and proceeded to make the following survey as per plat and notes & established a corner 8 rods East of the S. W. corner of section 12 T 7 N 2. W. I had for assistants James Kirk William & Tully chain markers Commodore Ferguson flag bearer all sworn. I hereby certify the foregoing to be a true and correct report of the survey made by me as I verily believe. In witness whereof I attach my hand and seal  
L. M. Bourne.



Survey of Section 6 T. 7 R. 1 E

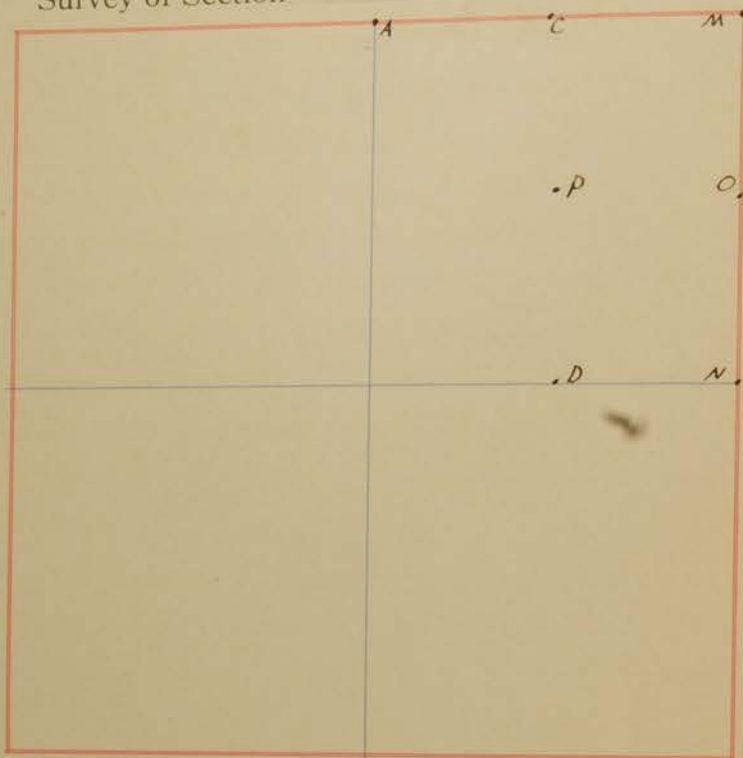

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { Oak	8	S 56½° W	26	N { Beech	20	N 30½° W	38
{ Oak	6	S 49° E	29	{ "	14	S 52½° W	16
C { Beech	20	S 31° W	69½	O { W Beech	5	N 60½° E	32½
{ Oak	22	N 31° W	66	{ Elm	24	N 83½° W	52
D { Ash	7	S 73° E	6½	P { Beech	14	N 16½° W	85
{ Oak	2½	S 68½° W	20½	{ "	15	S 59° W	40½
M { Maple	10	S 74° E	145½				
{ Stone	W.	S 45° W	30				

## To be Snoddy

Aug 26  
1904


Legal notice having been given I met at appointed time and place proceeded to make the following survey as per plat and notes I had for assistants Frank Corman W H May chain markers John H Hayes flag bearer all agreed upon and qualified. I hereby certify the foregoing to be a correct report of the survey made by me as I verily believe. In witness whereof I attach my hand and seal

C M Bourrs

Bearings	Distances
30 1/2° W	38
52 1/2° W	16
60° E	82 1/2
83 1/2° W	62
16 1/2° W	45
59° W	40 1/2



Survey of Section 11 T. 9 R. 2 W

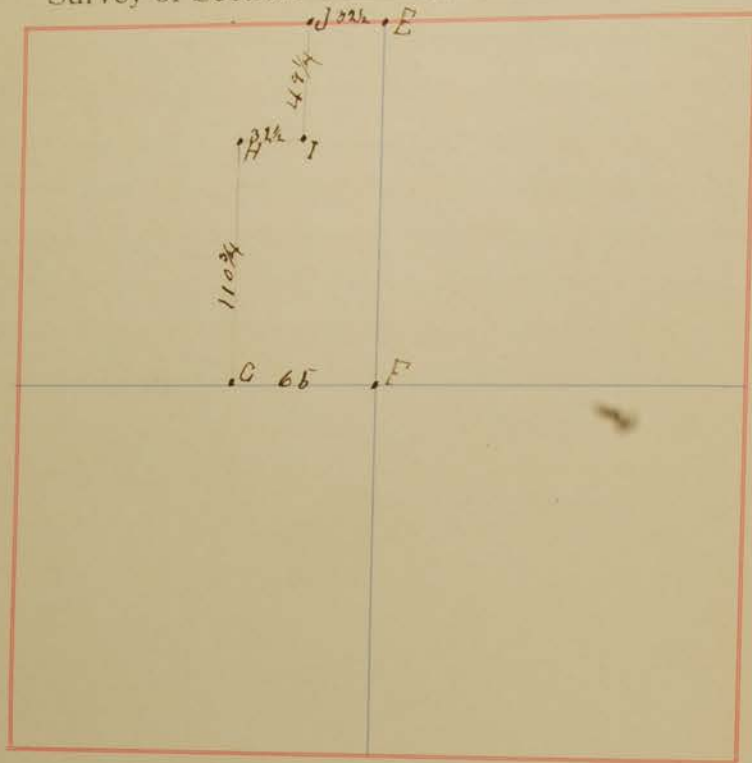

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
B Walnut	8	N 26 1/2° E	24 1/2	S is 32 1/2 rds E of H			
Stone	4x4	S 6° W	32	B Beech	5	S 76 1/2° W	17
W oak	24	N 13° E	56 1/2	Ironwood	5	S 1° E	12 1/2
Elm	5	N 68 1/2° W	14 1/2	J is 32 1/2 rds W of E			
S is 65 rds W of F Stone 5x5				B Walnut	12	N 46 1/2° W	22 1/2
B Walnut	8	S 5 1/2° E	114	W oak	12	S 22 1/2° W	34
A sh	8	S 2 1/2° E	104				
H is 110 3/4 rds N of S Stone 4x5							
Stone	4x4	S 20° E	10				
"	4x4	N 10° W	10				

## John Sherfield

Aug 30  
1904

Legal notice having been given I met interested parties at appointed time and place and organized by qualifying Ira Medray John Sherfield chain markers Loya Sherfield flag bearer we then proceeded to make the following survey as per plat and notes I hereby certify the foregoing to be a true and correct report of the survey as made by me as I verily believe in witness whereof I attach my hand and seal

C. M. Bowers

Readings	Distances in feet
H	
6 1/2° W	17
1° E	12 1/2
E	
6 1/2° W	22 1/2
1/2° W	34



[illegible]

I met the following parties  
 at the residence of William  
 Rogers June Rogers the  
 owners of these lands  
 north west quarter of the  
 long west and show a  
 also situated the  
 of William Rogers to it  
 the about 2. of  
 by an agreement of the  
 for assistants Ray Rogers  
 Chapman and H. P. Mc  
 I hereby certify the  
 true and correct report  
 me made as I were

## Free T Rogers

Dec 1  
1904

I met the following parties by an agreement at the residents of William & Free namely Ray Rogers Henry Rogers Will & Free and proceeded to run the line necessary to determine the boundaries of their lands situated in the north west quarter of section 34 Town 9 Range 1 west and drove stakes for boundaries also reestablished the N  $\frac{1}{2}$  m. p. of section 34


Old witness Aug. 20 in N  $89^{\circ}$  E 63 lks  
New " Walnut 3 " N  $1\frac{1}{2}^{\circ}$  E 37 "

By an agreement of the parties concerned I had for assistants Ray Rogers and Will & Free chainmen and H. P. Headly flag bearer  
I hereby certify the foregoing to be a true and correct report of the survey by me made as I verily believe

George B Rader Deputy  
Surveyor Monroe Co



Survey of Section 18 T. 10 R. 1 W

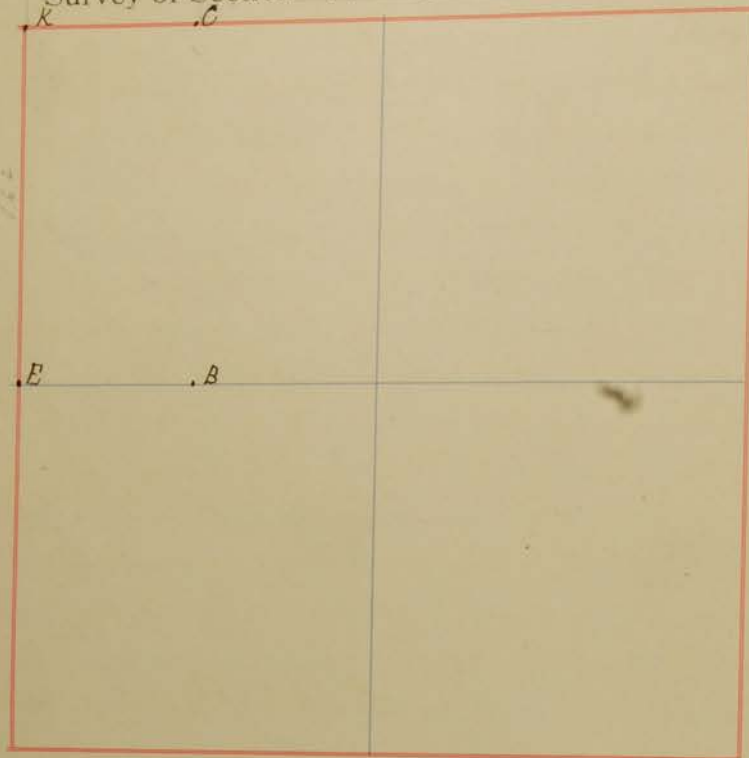

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
B { Oak	7	N 1° E	80	It is 162 rods N of the W 1/2 m.p. by agreement of H J Gallimore and G W Stivers iron pin 4 ft long witnessed by			
"	4	N 29 1/2° W	140				
C { Oak	12	N 51° W	41 1/2				
"	8	N 51° W	49 1/2				
"	10	S 56° E	13 1/2	H J Gallimore	4	N 76 1/2° E	6 1/2
E { Sug.	12	N 65° E	51	"	16	N 24 1/2° E	113

## Gallemore &amp; Stivers

Dec 5  
1904

A written ten days notice having been given I met at appointed time and place and organized by qualifying William Wampler Douglas bands chainman Marion Fulford flagman we then proceeded to make the following survey in section 18 town 10 range 1 west as per plat and notes, we also perpetuated the  $\frac{1}{2}$  distance between the W $\frac{1}{2}$  m p and center of section T. 10 R. 1 W. by marking hickory 15m S 76° W 73 $\frac{1}{2}$  lks, Sugar 5m N 79° E 66 lks I hereby certify the foregoing to be a true and correct report of the survey made by me as I verily believe In witness whereof I attach my hand and seal

C. M. Bowers

The W $\frac{1}{2}$  m p  
of Gallemore  
iron pin 4  
y  
76° E 66  
44° E 115





I M. W. Buskirk do solemnly swear that I will support the constitution of the United States and the constitution of the State of Indiana and that I will faithfully and impartially discharge the duty of deputy Surveyor of Monroe County Indiana according to law, to the best of my skill and ability - so help me God

M. W. Buskirk

Subscribed and sworn to before me this 30<sup>th</sup> day of January 1905

Elmer Buskirk

This is to certify that I have this day appointed M. W. Buskirk a true and lawful Deputy Surveyor in Monroe County Indiana

Elmer Buskirk

February the 19<sup>th</sup> 1905 Surveyed for La Hillman in Section 20 T 8 R 1 W as follows

Commencing at a point on the monon railway west of the main track 34 Poles 14 links South of the north line of the North East qr of the South East qr of Section 20 T. 8. R. 1 W Running thence South with said R R track 24 Poles thence West 1 Pole and 15 lks to the center of the Bedford pike thence N 12° W with the center of said pike 4 Poles thence North with the center of said pike 20 Poles and 1 lks thence East 3 Poles and 8 lks to the beginning

I C. M. Bowers do solemnly swear that I will support the constitution of the United States and the constitution of the State of Indiana and that I faithfully and impartially discharge the duty of deputy Surveyor of Monroe County Indiana according to the law, to the best of my skill and ability so help me God.

C. M. Bowers

Subscribed and sworn to before me this 30<sup>th</sup> day of January 1905.

Elmer Buskirk

This is to certify that I have this day appointed C. M. Bowers a true and lawful Deputy Surveyor in Monroe Co. Ind.

Elmer Buskirk



Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
<i>contains an iron pin drove in ground.</i>							
N. White Elm	16.	S. $28\frac{1}{2}^{\circ}$ W.	17.				

Nov. 6  
1895

As written ten days notice having been given I met the interested parties on appointed day (Nov. 6. 1895) and at appointed place (Lander, Ind.) and proceeded to locate B. st. 1<sup>st</sup> st. and Craig's lot as per plat. Established cor. A 25 ft north of the South boundary of Sec. 34. T. 8. N. R. 1 W. and eleven hundred five 1105 ft from S. W. cor. of said section. The same cor. A being the S. W. cor. of James Craig's lot. Also same cor. marks east boundary of B. st. Also same cor. marks the North Boundary of 1<sup>st</sup> st. (As helper in this), C. M. Bowers, Deputy surveyor for Monroe County Ind.  
Elihu Bushirk M. C. S.



## Survey of Section

T. 7 N R. 1 W



## FIELD NOTES.

Gov. E. is  
 " 11  
 " 11  
 R. is the  
 H. is 3rd  
 K. is 12 $\frac{1}{2}$

May 30<sup>th</sup> 1906.

According to agreement I met John Scott. and proceeded to ~~making~~ make the following survey. according to field notes and plat. as chainmen I had Lafayette Underwood & Joseph H. Luther. both duly sworn. we proceeded to locate the center of the old road bed. vacated by <sup>the</sup> construction of a macadamized road in the south half of section 18. <sup>T. 7</sup> N. R. 1 W. measuring from bank on east side of old road bed to bank on the West side of said road bed. and taking the half distance we found the center of said road bed to be  $12\frac{1}{2}$  ft. East of cor. H. we planted a round stone in said place ( $12\frac{1}{2}$  ft. East of cor. H.) to establish the center of old road bed. Thence proceeded to run North to the center half mile line we there did the same thing as at the south end. we measured from bank on east side 30 ft west took the half distance and planted a stone 5 ft. 4 in East of T. to mark center of old road bed.

Cor. E. is in center of said section

" T. 3 poles west of center.

" J. " 5 ft 4 in East of Cor. T. and is center of old road bed.

B is the South  $\frac{1}{2}$  mi post.

H is 8 rd. west of J. and is the cor. John Scott's land.

K is  $12\frac{1}{2}$  feet East of H. and is the center of the old road bed.

Elmer Bunker



Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
L Oak	13	S 16° East	25 lks				
Sugar	16	N 26½° East	7½ lks				
Buck	12	S 10° West	47 lks				
Buck	9	N 68½° East	27½ lks				

Sept  
25<sup>th</sup>  
1905

A written ten days notice having been given  
I met interested parties on appointed date  
(Sept 25<sup>th</sup> 1905) after qualifying David Shields  
John White chairman and Andy Peckard flagman  
we then proceeded to make the following survey  
in Section 12 Town 7 North Range 1 West as  
per plat and notes established the North  $\frac{1}{2}$  m p  
of said section witnessed by

L { Bark 13 in S  $15^{\circ}$  E 25 lks

Sugar 16 in N  $25^{\circ}$  E  $7\frac{1}{2}$  lks

Also established a stone 80 rods E. of the N.  $\frac{1}{2}$  m p.

N { Beech 12 in S  $10^{\circ}$  W 47 lks

Buck 9 " N  $66\frac{1}{2}^{\circ}$  E  $27\frac{1}{2}$  lks

I hereby certify the foregoing to be a true and  
correct report of the survey made by me on  
above date as I verily believe In witness  
whereof I attach my hand and seal

C. M. Bowers  
Deputy  
M. C. S.



[illegible]

May 1<sup>st</sup>  
1905

By agreement of William Masters William Snoddy and Sam Lammam I met at appointed time and place after qualifying John Butcher William L. Masters exhammen and David

Masters flagman we then proceeded to make the following survey as per plat and notes in section 18 Town 8 range 1 west established the southwest corner of said section witnessed by

H { Hickory 7m S  $11\frac{1}{2}^{\circ}$  east  $5\frac{1}{2}$  lks  
Oak 7m S  $42\frac{1}{2}^{\circ}$  west 18 lks

perpetuated the  $\frac{1}{2}$  distance between between the southwest corner and south  $\frac{1}{2}$  m p of said section witnessed by

D { Elm 3 m S  $30^{\circ}$  west  $23\frac{1}{2}$  lks  
Buck 5 m S  $71^{\circ}$  west 31 lks

I hereby certify the foregoing to be a true and correct report of survey made by me on above date as I verily believe I'm witness whereof I attach my hand and seal

C. M. Bowers  
Deputy  
M. C. S.



[illegible]

May 22  
1906

All interested parties having been duly notified we met on appointed time (May 22nd 1906) and after qualifying the following assistants John W Morgan O dress Leonard Chammere Haskel Turner flagman we then proceeded to make the following survey in section 23 Town 7 north range 2 west as per plat and notes established the distance between the northeast corner and east  $\frac{1}{2}$  m<sup>p</sup> of said section witnessed by

C { Ash 6 in S  $89^{\circ}$  west 91 lks  
Ash 10 in N  $66\frac{1}{2}^{\circ}$  west 94 lks

I hereby certify the foregoing to be a true and correct report of survey made by me on above date as I verily believe In witness whereof I attach my hand and seal

L M Bowers  
Deputy  
M. C. S.



FIELD NOTES.							
Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { sugar stone set	8	S 63° W	22 1/2				
B { no wiles							
C { dog wood	6	S 9° E	3 1/2				
D { walnut	12	S 19° E	8 L				
E { ash	12	N 15° E	28				

Feb 11 1911 I sent the  
Miner to  
with Dr.  
to see the  
of Thomas  
of the town  
and establish  
the center  
with  
Elack  
and the  
with  
A. Taylor to  
the south  
stone at  
C. no water  
the north  
water  
C. dog wood  
by an eagle  
assistant  
Chimney  
I hereby  
report of

Feb 13  
1913

I met the folling parties by agreement at the residence of  
Mimer Shivelys namely J. L. Butcher Thomas Nelson  
With Stinger J. P. Turner and James Henry and proceeded  
to run the lines neccery to determine the boundry lines & corners  
of Thomas Nelsons land situated in the north west corner  
of the south east quarter section of 24 town 9 range 2 west  
and established the folling corners as follows  
the center corner of said said section by the witness trees  
witness

D { Black walnut 12 in S  $19^{\circ}$  E 22 links  
Ash 12 " N  $13^{\circ}$  E 24 "

and the south west corner is 40 rods south of center of section  
witness

A { Sugar 8 in S  $63^{\circ}$  W 22  $\frac{1}{2}$  links

the south east corner is 80 rods east of the south west corner

B { stone set  
no witness

the north east corner is 80 rods east of center of section  
witness

C { dog wood 6 in S  $9^{\circ}$  E 3  $\frac{1}{2}$  links

by an agreement of the parties I had Sherell Hazel,  
assistant surveyor and With Stinger and James Henry  
Chairmen and my self as flagman

I hereby certify the forgoing to be a true and correct  
report of the survey made by me and verily believe

C. R. Whitaker  
M. C. S.



Survey of Section 20 T. 7 R. 18



FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { Hickory	3	S 44° W	6 1/2				
{ Hickory	4	N 35° E	8 1/2				
G { Beech	14	N 6° E	24				
{ Beech	28	N 46° W	7 1/2				
I { Oak	2	S 76° E	13				
{ Oak	8	N 84° W	28				
J { Hickory	2	N 25 1/2° E	2 1/2				
{ Oak	2	S 15 1/2° W	2				
B { sandstone		90° E	10				
{ sandstone		90° W	10				

April 3  
1906


All interested parties having been duly notified according to law we met on above date and after qualifying John Mitchell Ben Mitchell chain carriers & 2 Norman flag carriers we proceeded to make the following survey in section 20 T. 7. R. 1. E. as per plat and notes perpetuated the  $W\frac{1}{2}$  m.p. of said section witnessed by Hickory 3 in S.  $44^{\circ}$  W  $5\frac{1}{2}$  lks Hickory 4 in N.  $36^{\circ}$  E  $8\frac{1}{2}$  lks, perpetuated the distance between the  $N\frac{1}{2}$  m.p. and N. W corner witnessed by, Beech 14 in N.  $3^{\circ}$  E 24 lks Beech 28 in N.  $86^{\circ}$  W  $7\frac{1}{2}$  lks established a corner at the distance between the  $W\frac{1}{2}$  m.p. and S. W. corner witnessed by Oak 2 in S.  $76\frac{1}{2}^{\circ}$  E 13 lks Oak 8 in ~~N.  $44^{\circ}$~~  N.  $48^{\circ}$  W 28 lks established a corner at the center of the S W quarter witnessed by Hickory 2 in N.  $26\frac{1}{2}^{\circ}$  E  $2\frac{1}{2}$  lks Oak 2 in S.  $16\frac{1}{2}^{\circ}$  W 2 lks perpetuated the distance between the center and  $W\frac{1}{2}$  m.p. witnessed by sandstone marked W  $90^{\circ}$  E 20 lks sandstone marked W  $90^{\circ}$  W 10 lks.

I hereby certify the foregoing to be a true and correct report of the survey made by me on above date as I verily believe. In witness whereof I attach my hand and seal

C. M. Bowers  
Deputy



Survey of Section 8 T. 8 R. 1 E

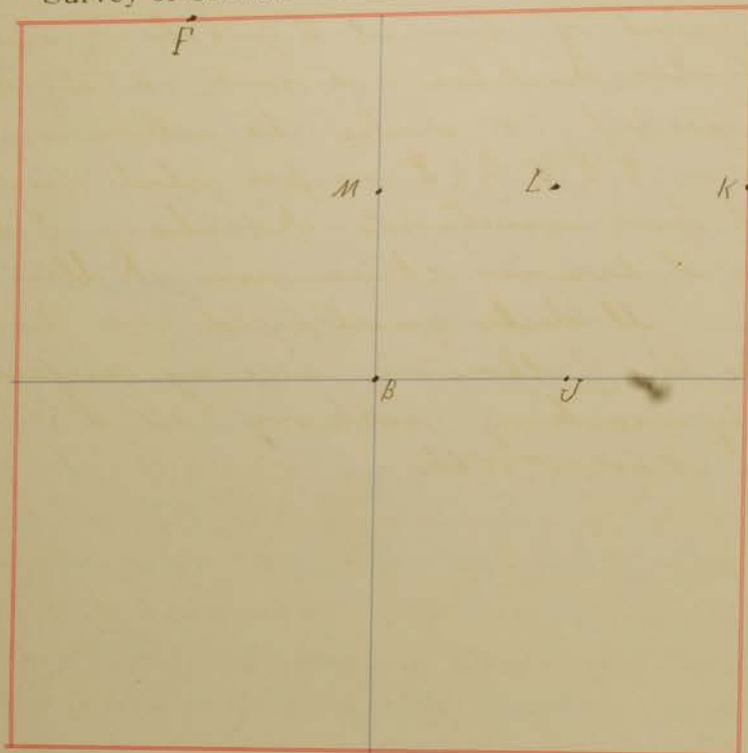

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
B { Hickory	7	S 30 1/2° E	63 1/4				
sugar	6	N 50° W	37				
J { Hickory	7	N 70 1/2° E	18				
beech	6	S 59° E	15				
Hickory	6	S 60° W	10				
K { Wood	4	N 71° E	13 1/2				
sugar	6	N 17 1/2° W	12 1/2				
L { maple	8	N 28 1/2° W	25 1/2				
maple	2	S 60° E	6				
M { maple	3	S 6 1/2° E	102				
Hickory		N 40 1/2° W	24 1/2				
P { sugar	4	S 43 1/2° E	38				
sugar	3	N 64 1/2° W	6 1/2				

CA pr 14  
1907


By agreement of Samuel P Jacobs Sam Lamphins  
and A Rodia Bulcher we met on above date  
and proceeded to make the following survey  
in section 8 5 8 R 1 E as per plat and notes  
we had for assistants Abraham S Skirwin  
William S Skirwin Chammun A Glen Carler  
flagman all duly qualified we then proceeded  
to make the following survey. perpetuated the  
center by marking hickory 7 in S  $30\frac{1}{2}^{\circ}$  E 63  $\frac{1}{2}$  lbs  
sug. 6 in N  $60^{\circ}$  W 37 lbs, established the  $\frac{1}{2}$  distance  
between the center and E  $\frac{1}{2}$  mp witnessed by  
hickory 9 in N  $70\frac{1}{2}^{\circ}$  E 18 lbs buck 6 in S  $59^{\circ}$  E 15 lbs  
hickory 6 in S  $60^{\circ}$  W 10 lbs established the  $\frac{1}{2}$  distance  
between E  $\frac{1}{2}$  mp and N.E. corner witnessed by  
W oak 4 in N  $71^{\circ}$  E 13  $\frac{1}{2}$  lbs, sugar 6 in N  $17\frac{1}{2}^{\circ}$  W 12  $\frac{1}{2}$  lbs  
established the center of the N.E. quarter witnessed by  
maple 8 in N  $28\frac{1}{2}^{\circ}$  W 25  $\frac{1}{2}$  lbs, maple 2 in S  $60^{\circ}$  E 6 lbs  
established a corner at the intersection of the  $\frac{1}{2}$  section  
line running N.E. S and the N.  $\frac{1}{2}$  section line running  
E.T.W. witnessed by maple 3 in S  $6\frac{1}{2}^{\circ}$  E 102 lbs  
stone N  $40\frac{1}{2}^{\circ}$  W 24  $\frac{1}{2}$  lbs perpetuated the  $\frac{1}{2}$  distance  
between the N.W. corner & N  $\frac{1}{2}$  mp witnessed by  
sugar 4 in S  $43\frac{1}{2}^{\circ}$  E 38 lbs sug 3 in N  $64\frac{1}{2}^{\circ}$  W 6  $\frac{1}{2}$  lbs

I hereby certify the foregoing to be a true and  
correct report of survey made by me on above date  
as I verily believe I'm witness whereof I attach  
my hand and seal

C. M. Bowers



Survey of Section 14 T. 10 R. 2 *W*

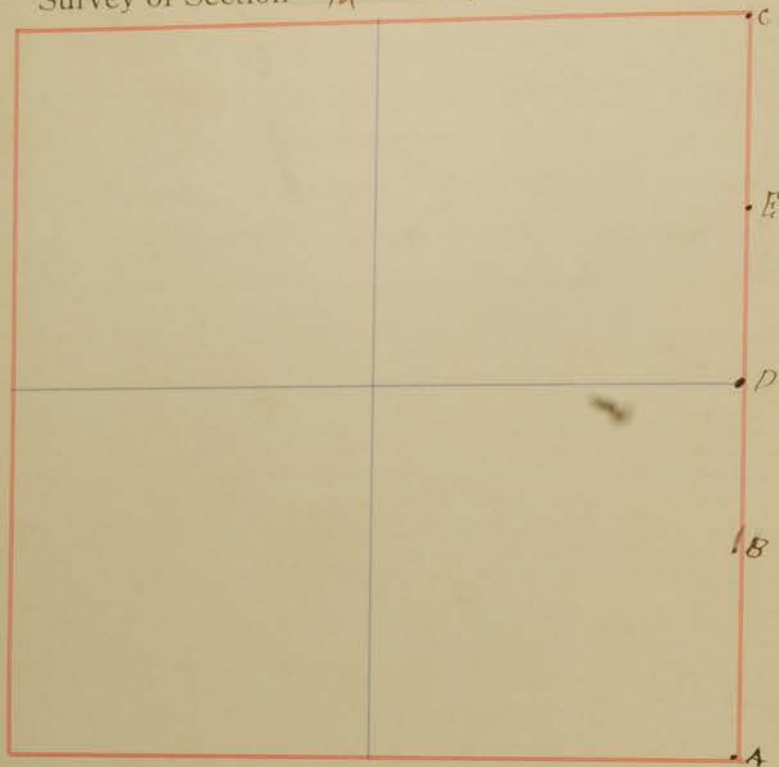

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
<i>G</i> lone		<i>N 2° W</i>	<i>23 ft 8 in</i>				
<i>A</i> { "		<i>S 2 1/2° E</i>	<i>24 ft 3 in</i>				
<i>B</i> { Stone		<i>N 27 1/2° E</i>	<i>6' 6"</i>				
{ Stone		<i>W</i>	<i>15'</i>				
{ Sand stone		<i>N</i>	<i>6'</i>				
{ " "		<i>W</i>	<i>6'</i>				
<i>D</i> { Stone		<i>N</i>	<i>8'</i>				
{ Stone		<i>S</i>	<i>8'</i>				
{ Lime stone		<i>N</i>	<i>20'</i>				
{ " "		<i>S</i>	<i>20'</i>				

Oct 14 1913 A written ten days notice having been given to interested parties we met on appointed time and place and organized by qualifying Sam Buskirk and James Prater as chainmen and Came McNeely flagman we proceeded to make the survey in section 14 T 10 R 2 W as shown on opist page as to lines and corners shown on snap

I here by certify the foregoing to be a true and correct correct report made by of the survey made by me on above date as I verely believe In witness where of I attach my hand and seal

C. R. Whitaker  
M. C. Surveyor



## Survey of Section

T. 10

R. 2 W

## FIELD NOTES.


FIELD NOTES.							
Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { Burr oak	4	N 36° W	54				
Thorn	6	N 32½° W	70½				
B { Hackberry	18	S 6° E	14				
Elm	3	S 52½° W	101½				
C { Elm	3	S 30° E	12½				
Elm	8	S 38° W	16				
D { Hackberry	6	N 73° W	54				
E { Sugar	2	S 29° E	25				
P { hove	3	N 48° E	8¾				
hove	6	N 76½° E	8½				

May 2  
1907

By agreement of b. E. Wampler Minnie Wampler  
and Quick T. Son I met on above date and proceeded  
to make the following survey in section 14 T 10 R 2 W  
as per plat and notes established a stone 60 rods E of  
the W  $\frac{1}{2}$  mp witnessed by Burr oak 4 in N  $36^{\circ}$  W  $64$  lks  
thence 6 in N  $32\frac{1}{2}^{\circ}$  W  $70\frac{1}{2}$  lks thence N  $23\frac{1}{2}^{\circ}$  W  $41$  rods to a  
stone witnessed by hackberry 18 in S  $6^{\circ}$  E  $14$  lks, elm  
3 in S  $52\frac{1}{2}^{\circ}$  W  $101\frac{1}{2}$  lks thence S  $70^{\circ}$  W  $11\frac{1}{2}$  rods to a +  
in a solid ledge of rock witnessed by elm 3 in S  $30^{\circ}$   
E  $14\frac{1}{2}$  lks elm 8 in S  $38^{\circ}$  W  $16\frac{1}{2}$  lks thence N  $2$  rods to  
a stone witnessed by hackberry 6 in N  $73^{\circ}$  W  $64$  lks  
thence S  $70^{\circ}$  W  $2$  rods to a stone witnessed by  
sugar 2 in S  $29^{\circ}$  E  $25$  lks thence S  $2$  rods to a  
+ in a solid ledge of rock witnessed by  
hawe 3 in N  $48^{\circ}$  E  $9\frac{1}{2}$  lks hawe 6 in N  $75\frac{1}{2}^{\circ}$  E  $8\frac{1}{2}$  lks  
thence S  $70^{\circ}$  W to the N E corner of cemetery  
We had for assistants J. J. Douglas Thomas Miller  
chainman Elmer Buckirk flagman all duly  
qualified I hereby certify the foregoing to be  
a true and correct report of the survey made  
by me on above date as I verily believe I am  
witness whereof I attach my hand and seal  
C. M. Bowers.



Survey of Section 35 T. 9 R. 1 W

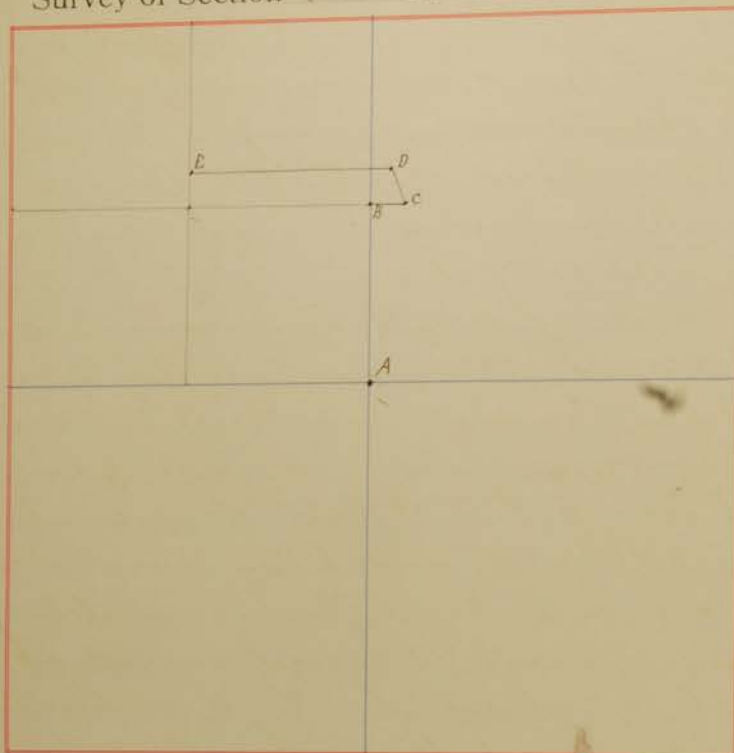

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A {perpetuated leygamore	10	S 70° E	77				
B {stone		S 87° W	16				
stone		S 4° W	14				
C {Walnut	10	S 46° W	47½				
leygamore	2	N 57° W	34				
D {Walnut	2	N 61° E	20				
iron pin		S 23½° W	34½				
E {elm	4	S 4½° E	42				
hackberry	2	S 9½° E	18¾				
cherry	2	N 1½° E	50				


Legal notice  
in the above  
survey of the  
Heavy 11  
William 11  
and May 11  
May 11  
and 11  
of William 11  
the following  
in section 35  
of said section  
against the  
distances between  
intersected by  
1012 lbs. value  
The center of  
intersected by  
eyeamore line  
16 rods 10 lbs. to  
last Walnut  
stone S 23½°  
stone 16 rods 10 lbs.  
quarter witness  
hackberry line  
16 rods

May 13 1907 Legal notice having been given by publication in the Bloomington weekly Telephone we met pursuant thereto and organized by qualifying Henry Wantland Richard Rottiff chairman William Adams flagman we then adjourned to meet May 25 1907 at 7 a.m.

May 25 1907 May 25<sup>th</sup> met according to adjournment of May 13 and qualified. Amlin H. Hadley flagman instead of William Adams we then proceeded to make the following survey as per plat and notes in section 35 T 9 R 1 W perpetuated the center of said section by marking new witness eyeamore 10 m S 70° E 77 lks established the distance between the center and NW 1/4 corner by stone S 87° W 16 lks stone S 40° W 14 lks established a stone 99 rods 12 1/2 ft E of the center of the NW quarter of said section witnessed by Black Walnut 10 m S 46° W 47 1/2 lks eyeamore 2 in N 57° W 34 lks Thence at 17 1/2° W 16 rods 10 lks to a stone witnessed by black Walnut 2 in N 61° E 20 lks From said stone S 23 1/2° W 34 1/2 lks established a stone 16 rods 10 lks N of the center of the NW quarter witnessed by elm 4 in S 4 1/2° E 42 lks hackberry 2 in S 9 1/2° E 12 1/4 lks Weherry 2 in at 1 1/2° E 50 lks



Survey of Section 20 T. 9 R. 1 E

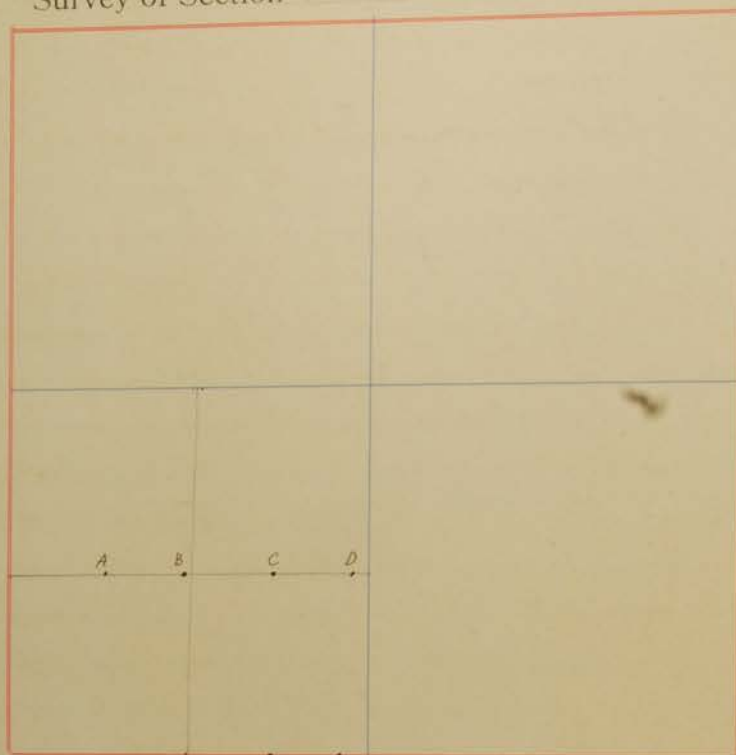

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { Oak	2	S 47° W	60				
{ poplar	6	S 51½° E	53½				
B { Beech	18	S 32° W	2½				
{ maple	7	S 72° E	27½				
C { Oak	8	S 46½° E	36½				
{ Oak	11	S 1° W	36½				
D { Oak	24	S 65° E	3				
{ Oak	22	N 46½° W	11				
E { Sycamore	24	N 87° E	61				
{ Sycamore	2	N 85° W	43½				
F { Oak	7	S 42° E	14½				
{ Oak	4	N 89° W	24½				
G { Walnut	11	N 52° W	69½				
{ Beech	10	S 8° W	68				
H { Sycamore	11	N 84½° E	94				
{ Walnut	20	N 32° E	33				


May 17  
1907

Legal notice having been given to Cornelius Meadows, John A. Evans, Lawrence Curry, John Prince, and William Galyan I met at appointed time and place and organized by qualifying William Galyan Michael Bourk chairman James Gallyan flagman we then proceeded to make the following survey in sec 20 T 9 N 1 E as per plat and notes, established a stone at the  $\frac{1}{2}$  distance between the center of the S.W. qr and the  $\frac{1}{4}$  m.p. witnessed by, W oak 2 in S  $47^{\circ}$  W 60 lbs poplar 6 in S  $61\frac{1}{2}^{\circ}$  E  $63\frac{1}{2}$  lbs, "B" is 39 rds 4 lbs E of "A" witnessed by buck 18 in S  $32^{\circ}$  W 12 lbs, maple 7 in S  $72^{\circ}$  E 274 lbs "C" is 38 rds 16 lbs E of "B" witnessed by, W oak 8 in S  $46\frac{1}{2}^{\circ}$  E  $36\frac{1}{2}$  lbs W oak 11 in S  $1^{\circ}$  W 36 lbs "D" is 4 rds W. of the  $\frac{1}{2}$  distance between the  $\frac{1}{2}$  m.p. and the center witnessed by, R oak 24 in S  $66^{\circ}$  E 3 lbs, R oak 22 in N  $46\frac{1}{2}^{\circ}$  W 11 lbs "E" is 11 rds 12 lbs W. of the  $\frac{1}{2}$  m.p. witnessed by, eyeamore 24 in N  $87^{\circ}$  E 61 lbs, eyeamore 2 in N  $86^{\circ}$  W  $43\frac{1}{2}$  lbs, "F" is 36  $\frac{2}{3}$  rds W of "E" witnessed by, B oak 7 in S  $42^{\circ}$  E  $14\frac{1}{2}$  lbs B oak 4 in N  $89^{\circ}$  W  $24\frac{1}{2}$  lbs "G" is 76  $\frac{2}{3}$  rds E and 6 rds S. of the S.W. corner of section witnessed by, B walnut 11 in N  $62^{\circ}$  W 69 lbs buck 10 in S  $8^{\circ}$  W 68 lbs, "H" is 40 rds E and 19 rds S of S.W. corner of said section witnessed by eyeamore 11 in N  $84\frac{1}{2}^{\circ}$  E 94 lbs, W walnut 20 in N  $32^{\circ}$  E 33 lbs I hereby certify the foregoing to be a true and correct report of the survey made by me as I verily believe I am witness whereof I attach my hand and seal

L. M. Bowers



Survey of Section 6 T. 10 R. 2 W

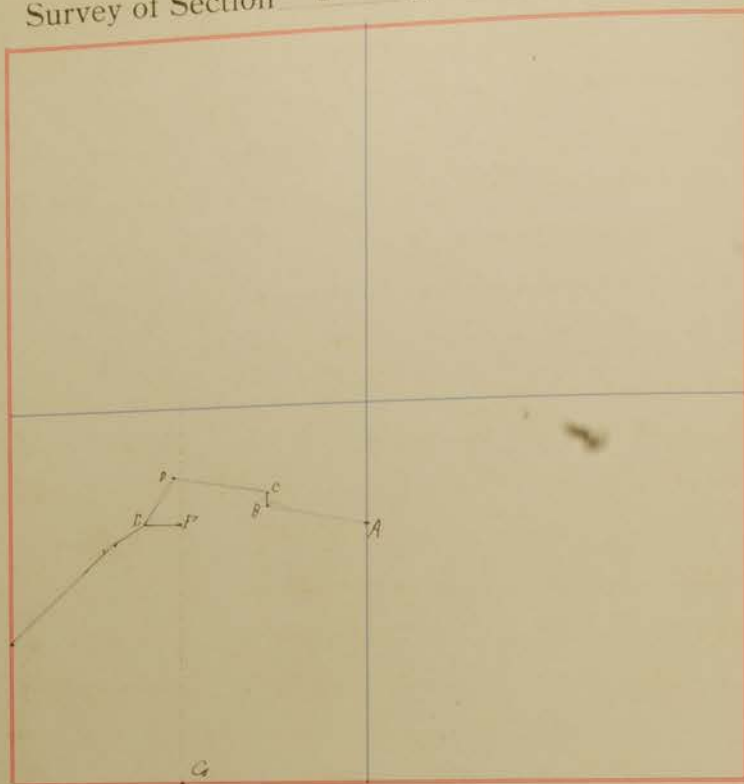

FIELD NOTES.

W	Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A	A { Barabunt Stone	2 1/2 x 10	S 36 1/2° E N 76 1/2° W	6 1/2 25 1/2	Commencing at the S. corner of section 6 town 10 range 2 west thence N 61° 20' thence N 40° 10' 62° 10' thence N 84° E 13° 10' 19° 10'			
B	B { cedar Thorn	6 3	S 81° W S 14 1/2° W	96 10				
C	C { eyeamre eyeamre	12 10	S 2 1/2° E S 63° W	68 37 1/2				
D	D { stone stone		N 33° E S 79 1/2° W	7 1/2 33 1/2				
E	E { bush bush	30 30	N 77° E N 76 1/2° W	176 154				
F	F { elm bush	20 22	S 63° E N 26° W	9 100				
G	G {							
H	H {							


May 20  
1907

Legal notice having been given we met pursuant thereto and organized by qualifying T J Smith Charles McHenry chamberlain Lane Payton flagman we then proceeded to make the following survey in section 6 T 10 R 2 W as per plat and notes established a corner 108 rd at  $N 4\frac{1}{2}^{\circ} W$  from the  $S\frac{1}{2}$  m.p. of said section 6 T 10 R 2 W witnessed by B walnut 2 in  $S 36\frac{1}{2}^{\circ} E 6\frac{1}{2}$  lbs stone  $2\frac{1}{2}$  by 10 in  $N 76\frac{1}{2}^{\circ} W 25\frac{1}{2}$  lbs thence at  $N 84\frac{1}{2}^{\circ} W 40$  rds to a stone witnessed by cedar 6 in  $S 82^{\circ} W 96$  lbs thorn 3 in  $S 14\frac{1}{2}^{\circ} W 10$  lbs thence at  $N 4\frac{1}{2}^{\circ} W 6$  rds to stone witnessed by, eyeamore 4 in  $S 2\frac{1}{2}^{\circ} E 68$  lbs eyeamore 10 in  $S 63^{\circ} W 38\frac{1}{2}$  lbs thence at  $N 84\frac{1}{2}^{\circ} W 41$  rds 2 lbs to a stone witnessed by stone  $N 33^{\circ} E 7\frac{1}{2}$  lbs stone  $S 77\frac{1}{2}^{\circ} W 33\frac{1}{2}$  lbs thence  $S 11\frac{1}{2}^{\circ} W 17$  rds 10 lbs to a stone witnessed by beech 30 in  $N 77^{\circ} E 175$  lbs thence  $E 13$  rds to a stone witnessed by beech 30 in  $N 76\frac{1}{2}^{\circ} W 154$  lbs established the distance between the  $S\frac{1}{2}$  m.p. and S.W. corner witnessed by elm 20 in  $S 63^{\circ} E 9$  lbs beech 22 in  $N 26^{\circ} W 100$  lbs I hereby certify the foregoing to be a true and correct report of the survey made by me on above date as I verily believe I'm witness whereof I attach my hand and seal.

C M Bowers



Survey of Section 22. T. 9 R. 1W

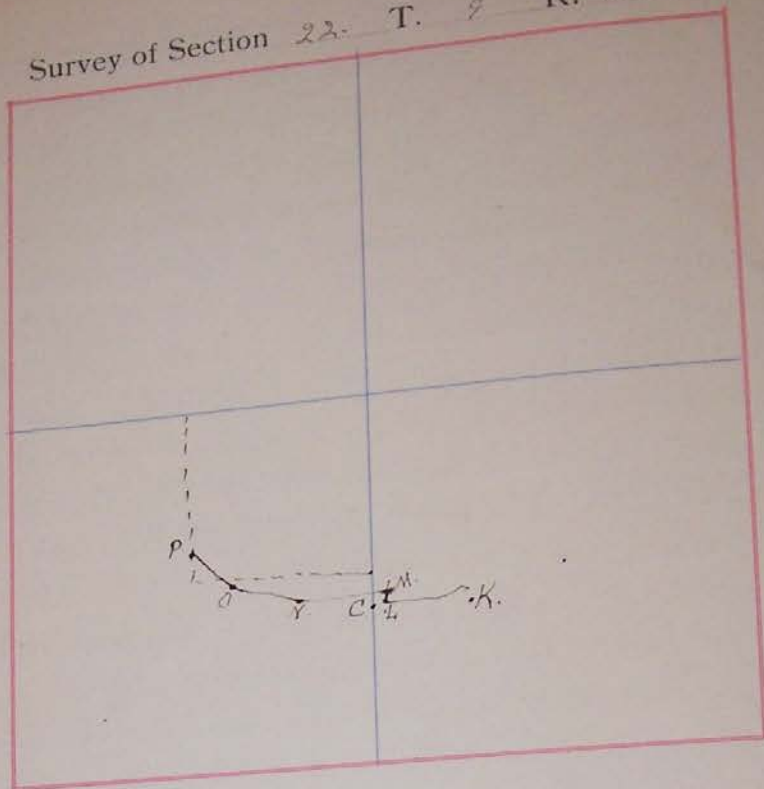

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { "K." Sand Stone tree 12.		North $43\frac{1}{2}^{\circ}$ W.	42 ft 4 11 in				
40 rd East of C		N. $25\frac{1}{2}^{\circ}$ East.	57 $\frac{1}{4}$ ft.				
B { 4. 100 ft by cor. "C"		South $29\frac{1}{2}^{\circ}$ East.	50 ft 4 14 in	Elm 3	5 in	South $60^{\circ}$ East.	46
"M" 100 ft by cor. 4.		South	28 ft.	Sand Stone	"W" 100 ft	North	36
C { "N" B. Walnut 10		North $3^{\circ}$ West	44 ft.	Elm	7 in	South $66\frac{1}{2}^{\circ}$ East.	43
O. Elm 6 in		South $24\frac{1}{2}^{\circ}$ East.	14 $\frac{1}{2}$ ft.	Elm	3 in	South $27\frac{1}{2}^{\circ}$ West.	8 $\frac{1}{2}$
D { P. 100 ft by cor. 4.		North $32\frac{1}{2}^{\circ}$ East.	34 $\frac{1}{2}$ ft.	Elm.	6 in	South $37^{\circ}$ West.	24
E {							
F {							
G {							
H {							

03/31/2009

# Hadley Hinkle Survey

Ordn. pursuant to notice given and made the following survey.  
Chairman John Hinkle and Bub. Brunner  
Sergeant. Hinkle Hadley.

The following line was agreed upon and established as the  
line between the Hinkle farm in section 22 S 2 N. R. 1 W. and  
the Hadley farm of same section.

Commencing at a point in the creek 40rd East 7 12rd South  
of the N. W. cor. of the S. W.  $\frac{1}{4}$  of the S. E.  $\frac{1}{4}$  of said section thence  
North 83° 40' 62 lks. to a sycamore, thence South 72  $\frac{1}{2}$  West 15 a bush 7 plks distance  
thence South 67° West 15 a watery bush. 3rd 4 19 lks distance thence  
South 87° West 26rd 9 6 lks to a stake set by cor "C." 5rd 4 19 lks distance thence  
North to center of creek thence with meanderings of creek in a  
westwardly & North west wandy direction to a point where creek  
crosses the West line of the N. E.  $\frac{1}{4}$  of the S. W.  $\frac{1}{4}$  of said section  
28 ft to center of creek said point being wit by a cor. stone South 28 ft. and a sand stone  
with a w. ore it North 36 ft distance, thence South 80° West 472  $\frac{1}{2}$  ft. to a stone wit by a  
black walnut 10 in North 3° West 44 ft also an Elm 7 in South 66  $\frac{1}{2}$  East 43 ft. dis. thence  
North 70  $\frac{1}{2}$  West 720 ft. to a sand stone wit by an Elm 6 in South 24  $\frac{1}{2}$  East 14  $\frac{1}{2}$  ft.  
also an Elm 3 in South 27  $\frac{1}{2}$  West 8  $\frac{1}{2}$  ft. thence North 38° West 389 ft to  
the West line of the North East  $\frac{1}{4}$  of the South West  $\frac{1}{4}$  of said section said point  
wit by a big lime stone fence post North 32  $\frac{1}{2}$  East 34  $\frac{1}{2}$  ft. also an Elm 6 in South  
37° West 24 ft. dis.

Oliver Buskirk


03/31/2009



Section 33

Survey of Section 32

T. 11 R. 2 W

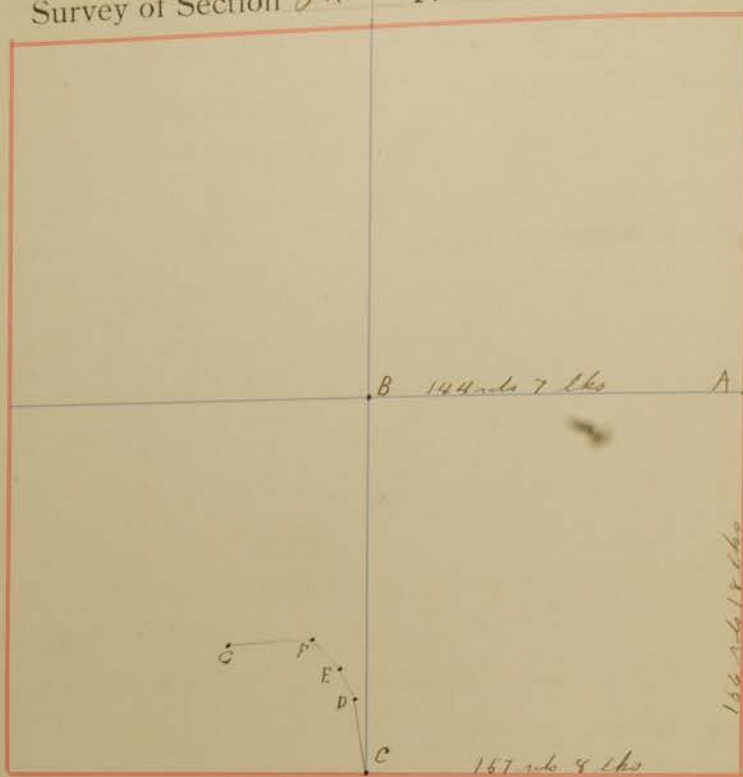

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { Stone		N 54 1/2° W	16				
{ Stone		S 13° W	16				
B { Sugar	30	N 27 1/2° W	10 1/2				
{ Stone		90° E	9				
C { Elm	6	S 11 1/2° W	43 3/4				
{ Walnut	22	N 43° W	223				
D { Mulberry	6	S 86° W	29 1/2				
{ Elm	8	S 76 1/2° W	35 1/2				
E { Beech	24	S 10° E	40				
{ Sugar	3	S 47° W	60				
F { Boxelder	8	S 12 1/2° E	41				
{ Hycamore	11	S 62 1/2° W	99				
G { Stone		N 2 1/2° E	24 1/2				
{ Stone		N 65 1/4° E	25				
H {							

May 22  
1907


A written ten days notice having been given to interested parties we met on appointed time and place and organized by qualifying Thomas Miller Fred C. Chenoweth chairman E. Limer Buskirk playman we then proceeded to make the following survey in sections 32 & 33 T 11 R 2 W as per plat and notes established corner "A" 186 rods 18 lbs N of the S & 1/2 m p of section 33 "B" is 144 rods 7 lbs W of "A". "C" is 167 rods 8 lbs W of the S & 1/2 m p of section 33. "D" is N 6° W from "C" 33 rods "E" is N 14° W from "D" 14 rods 6 lbs. "F" is N 38° W from "E" 17 rods. "G" is S 88° W from "F" 27 rods 11 1/2 lbs.

I hereby certify the foregoing to be a true and correct report of the survey made by me on above date as I verily believe. In witness whereof I attach my hand and seal

L. M. Bowers.



Survey of Section 36 T. 8 R. 1 W

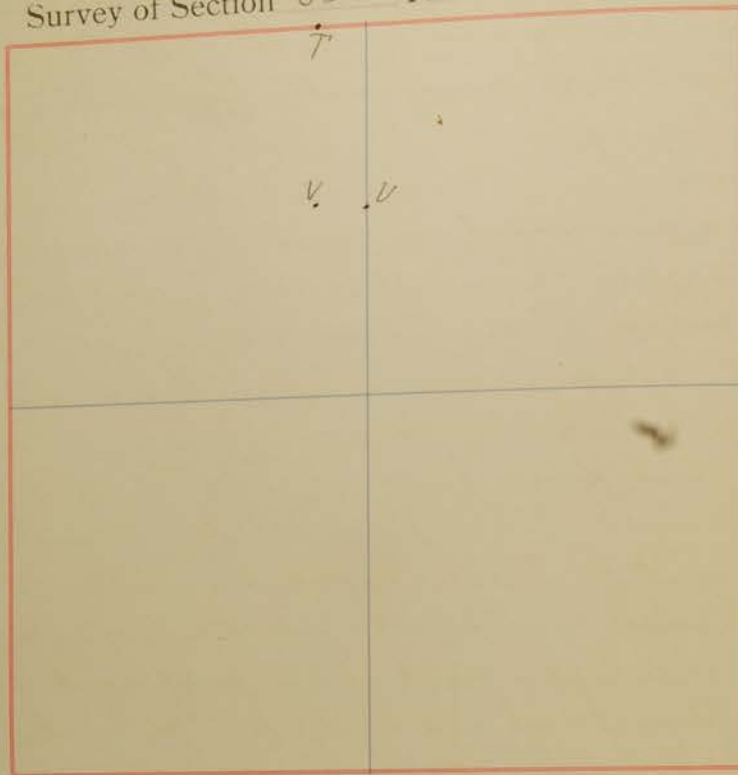

# FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { Beech	7	N 39° W	20				
{ Beech	3	S 27° E	26½				
B { Birch	6	N 14° E	9				
{ Birch	4	S 13½° W	10½				
C { Birch	6	S 83½° E	7				
{ Birch	4	N 36½° E	12½				
D { Birch	2	N 1½° E	14½				
E {							
F {							
G {							
H {							

Dec 17  
1907

Notice having been given in The Bloomington Star, we met pursuant thereto and organized by qualifying, Perwin Willis, Newton Adams exhammen, Jos. Duncan, Arthur Eades, flagmen, we then proceeded to make the following survey in Section 36 T. 8 N. R. 1 W. as per plat and notes established a stone 20 rods West of the N.  $\frac{1}{2}$  m.p. of said section witnessed by Beech 7m N  $38^{\circ}$  W 20 lks. Beech 3m S  $27^{\circ}$  E. 25  $\frac{1}{2}$  lks.

Established a stone at the  $\frac{1}{2}$  distance between the center and N.  $\frac{1}{2}$  m.p. of said section witnessed by B. oak 5m N  $14^{\circ}$  E 9 lks. B. oak 4m S  $13\frac{1}{2}^{\circ}$  W 10  $\frac{1}{2}$  lks.


Established a stone 20 rods West of the  $\frac{1}{2}$  distance between the center and N.  $\frac{1}{2}$  m.p. of said section witnessed by B. oak 5m S  $83\frac{1}{2}^{\circ}$  E 7 lks. B. oak 4m N  $36^{\circ}$  E 12  $\frac{1}{2}$  lks. B. oak 2m N  $1\frac{1}{2}^{\circ}$  E 14  $\frac{1}{2}$  lks.

I hereby certify the foregoing to be a true and correct report of the survey made by me on above date as I verily believe. In witness whereof I attach my hand and seal

L. M. Bowers



Survey of Section 16 T. 8 R. 1 East

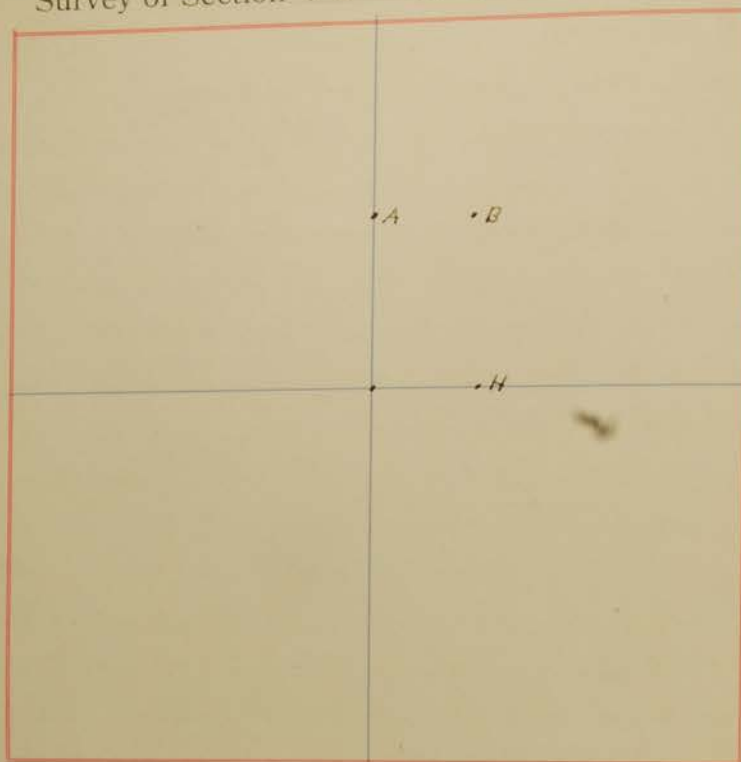

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { sandstone		West	7				
A { sandstone		East	5 1/2				
B { redbud 2		N 3° W	1				
B { sandstone		S 86° W	24 1/2				
C { W. walnut 3		S 73° W	19				
C { " 2		S 6° E	18 3/4				
D { Elm 14		S 32° W	38 1/2				
E							
F							
G							
H							

Nov 26 By agreement of Valentine Stays John  
1907. Mc Gown and Matilda Payne

We met on above date and proceeded to make the following survey as per plat and notes in section 16 T 8 R 1 W

We had for assistants John Ferrell, Samuel Stephens chainmen, Preston Payne flagman perpetuated the  $\frac{1}{2}$  distance between the center and the N  $\frac{1}{2}$  m p of said section witnesses sandstone West 7 lks sandstone East 5  $\frac{1}{2}$  lks redud 2 in N 3° W 1 lks.

established a stone 40 rds East of the  $\frac{1}{2}$  distance between the center and North  $\frac{1}{2}$  m p of said section witnessed by sandstone S. 86° West 24  $\frac{1}{2}$  lks

established a stone 40 rds East of the center of said section witnessed by W walnut 3 in S 78° W 19 lks W walnut 2 in S 6° E. 18  $\frac{1}{2}$  lks E lm 14 in S 32° W 38  $\frac{1}{2}$  lks


I hereby certify the foregoing to be a true and correct report of the survey made by me on above date as I verily believe.

In witness whereof I attach my hand and seal

C M Bowers.



Survey of Section 36. T. 8 R. 1 W

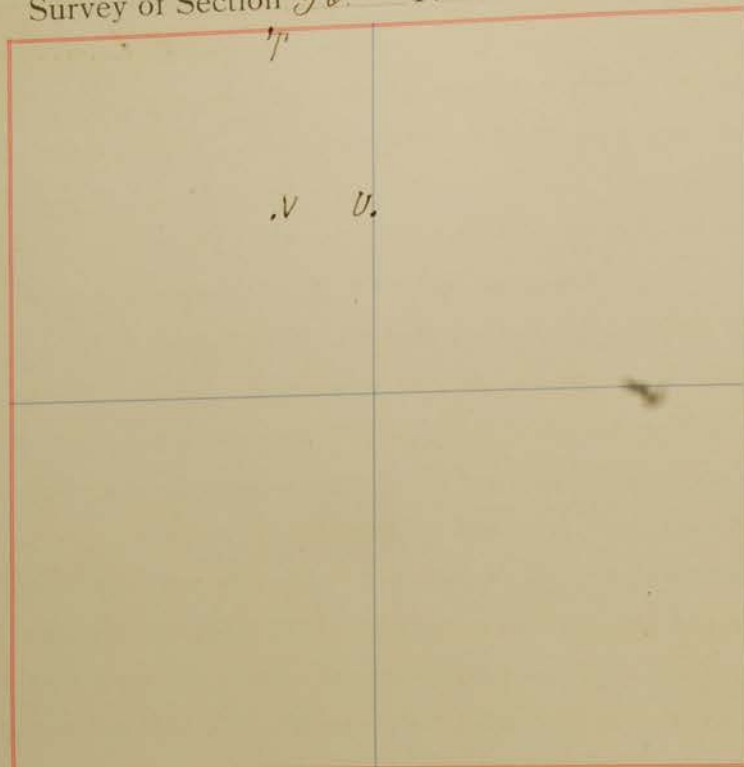

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A Beech	7	N 39° W	20				
B Beech	3	S 27° E	25½				
B Oak	5	S 14° E	9				
B Oak	4	S 13½° W	10½				
C Beech	5	S 83½° E	7				
C Oak	4	N 36½° E	12½				
D Oak	2	N 1½° E	14½				
E							
F							
G							
H							

Dec. 17<sup>th</sup>  
1907

Notice having been given in the Bloomington Star we met pursuant thereto and organized by qualifying Derwin Willis, Newton Adams, chairmen, Joseph Duncan, Arthur Eades flagmen we then proceeded to make the following survey in section 36 T 8 R 1 W. as per plat and notes established a stone 20 rods West of the North  $\frac{1}{2}$  m.p. witnessed by Beech 7 in N 39° W 20 lks, Beech 3 in S 27° E 25  $\frac{1}{2}$  lks established a stone at the  $\frac{1}{2}$  distance between the center and N  $\frac{1}{2}$  m.p. of said section witnessed by Oak 5 in S 14° E 9 lks Oak 4 in S 13  $\frac{1}{2}$ ° W 10  $\frac{1}{2}$  lks established a stone 20 rods W. of the  $\frac{1}{2}$  distance between the center and N  $\frac{1}{2}$  m.p. witnessed by Oak 5 in S 83  $\frac{1}{2}$ ° E 7 lks Oak 4 in N 36  $\frac{1}{2}$ ° E 12  $\frac{1}{2}$  lks Oak 2 in N 1  $\frac{1}{2}$ ° E 14 lks

I hereby certify the foregoing to be a true and correct report of the survey made by me on above date as I verily believe  
In witness whereof I attach my hand and seal

L. M. Bowers



Survey of Section 43 T. 9 R. 1 W



FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A P Beech	10	N 48 1/2° W	42				
Beech	20	S 89° W	27				
B Q Beech	10	N 60° W	68				
B Walnut	5	N 54° W	61				
C R Oak	14	S 12° W	17				
Beech	16	N on S	24				
D S W Walnut	14	N 38 1/2° E	32				
Hickory	18	S 77° W	112 1/2				
E							
F							
G							
H							

April  
1908

By agreement of Joseph Ryan, J. A. Belcher  
John A. Acker and George Ryan.

We met on above date and organized by  
qualifying Joseph Ryan flagman John  
A. Acker and Elijah Hawkins chainmen  
we then proceeded to make the following  
survey as per plat and notes in section  
23 T. 9. R. 10W perpetuated the  $N\frac{1}{2}$  mp of  
said section by marking new witnesses, Buck  
10 in  $N 48\frac{1}{2}^{\circ} W 42$  lks, Buck 20 in  $S 89^{\circ} W 27$  lks

Established a stone at the  $\frac{1}{2}$  distance between  
the  $N\frac{1}{2}$  mp and center of said section witnessed by  
Buck 10 in  $N 60^{\circ} W 68$  lks B. walnut 5 in  $N 54^{\circ} W 61$  lks

Established a stone at the center of the N. E  
quarter of said section witnessed by Oak 14 in  
 $S 12^{\circ} W 17$  lks, Buck 16 in  $N on 0^{\circ} 24$  lks


Established a stone at the  $\frac{1}{2}$  distance between  
the E.  $\frac{1}{2}$  mp and center of said section witnessed by  
W. walnut 14 in  $N 38\frac{1}{2}^{\circ} E 32$  lks, Hickory 18 in  $S 77^{\circ} W 112\frac{1}{2}$  lks

I hereby certify the foregoing to be a true  
and correct report of the survey made by me  
on above date as I verily believe I am witness  
whereof I attach my hand and seal

C. M. Bowers



Survey of Section 11 T. 7 R. 1 W.

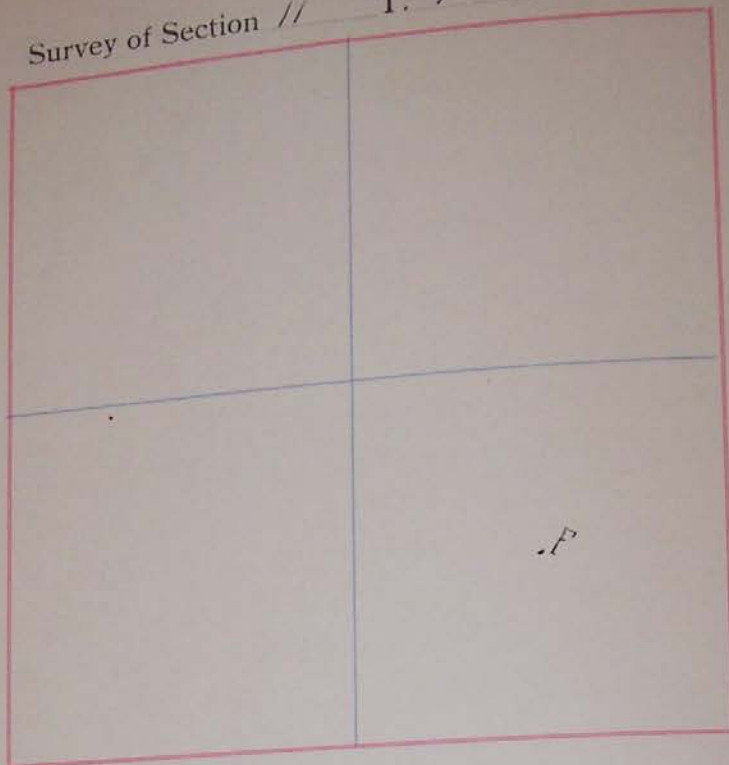

# FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { P { F B Oak	12	N 61° E	57 1/4				
{ H Hickory	10	90° E	58				
B { Q {							
C { R {							
D { S {							
E {							
F {							
G {							
H {							

03/31/2009

May 11  
1908

A written ten days notice having been given to interested parties we met on above date and organized by qualifying John C. Butcher Ed. Kelley chainmen. Asahel Turner William C. hambers flagmen

We then proceeded to make the following survey as per plat and notes in section 11 T 7 R 1 W

Established a stone at the center of the S.E. quarter witnessed by Oak 12 in at  $61^{\circ} E$  67 1/4 lbs Hickory 10 in  $90^{\circ} E$  68 lbs


I hereby certify the foregoing to be a true and correct report of the survey made by me on above date as I verily believe

In witness whereof I attach my hand and seal  
C. M. Bowers

03/31/2009



Survey of Section 7 T. 9 R. 1 E

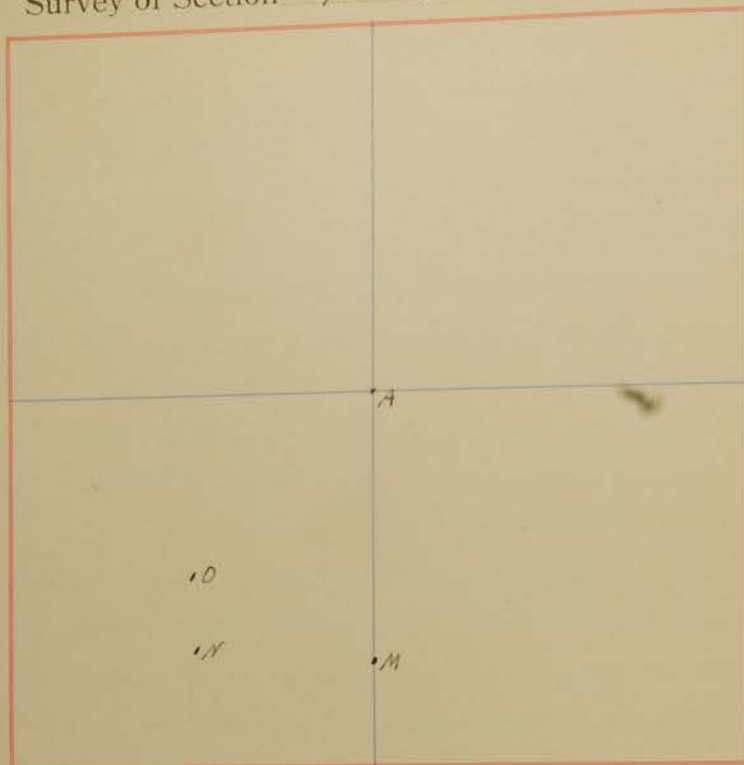

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A { Oak	10	S. 43° W	38				
W oak	6	N 79° W	16½				
B { Walnut	12	N 86½° W	126				
Sugar	12	N 16½° W	172				
C { Walnut	4	S. 17° E	18¾				
Walnut	8	S 68° E	87½				
D { Hickory	6	S 28° E	16½				
Beech	7	N 48½° E	20½				
E							
F							
G							
H							

Aug 13  
1908.

A written ten days notice having been given to the interested parties we met on above date and organized by qualifying, George Cox Alexander Young Chairmen George Jolleggi flagman.

We then proceeded to make the following survey in section 7 T 9 R 1 E as per plat and notes.

Reestablished the center of said section by marking new witnesses, Oak 10 in S  $43^{\circ}$  W 38 lks, Walnut 6 in N  $79^{\circ}$  W 16  $\frac{1}{2}$  lks

Established a stone at the  $\frac{1}{4}$  distance between the center and S  $\frac{1}{4}$  mp of said section witnessed by Walnut 12 in N  $86^{\circ}$  W 126 lks, Sugar 12 in N  $15^{\circ}$  W 172 lks

Established a stone at the  $\frac{1}{2}$  distance between the center of the S. W. quarter and the S  $\frac{1}{4}$  mp of said section witnessed by Walnut 4 in S  $17^{\circ}$  E 18  $\frac{1}{2}$  lks Walnut 3 in S  $60^{\circ}$  E 37  $\frac{1}{2}$  lks


Established a stone at the center of the S. W. quarter of said section witnessed by Hickory 6 in S  $28^{\circ}$  E 16  $\frac{1}{2}$  lks Oak 7 in N  $48^{\circ}$  E 20  $\frac{1}{2}$  lks

I hereby certify the foregoing to be a true and correct report of the survey made by me on above date as I verily believe. In witness whereof I attach my hand and seal

C. M. Bowers



Survey of Section 8 T. 8 R. 1 W.

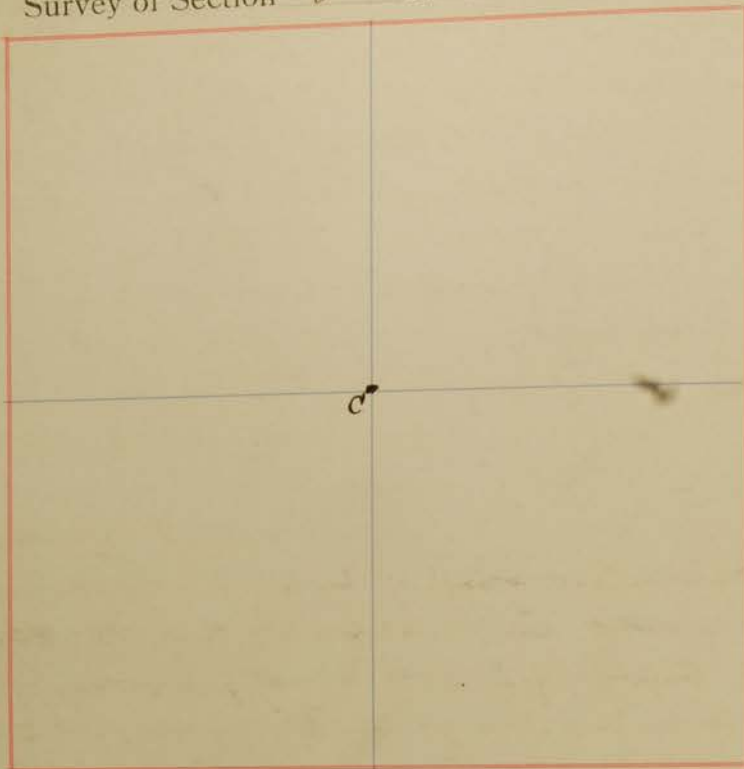

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A w. on a large stone		N. 75 1/2° W	37 1/2 lks.				
B							
C							
D							
E							
F							
G							
H							

at 1/4 Section  
constituted of the  
unusually large  
trees to the  
ability to help  
Substance and  
this is to certify  
a true and

At two days note  
following work  
from the house  
through the

I, S. H. Burkirk do solemnly swear that I will support the Constitution of Indiana and that I will faithfully and impartially discharge the duty of Deputy Surveyor of Monroe Co. Ind. according to law, to the best of my skill and ability so help me God. S. H. Burkirk

Subscribed and sworn to before me This the 1<sup>st</sup> day of Feb. 1909.  
This is to certify that I have this day appointed S. H. Burkirk  
a true and lawful Deputy Surveyor in Monroe Co. Ind.

Elihu Burkirk

M. C. S.

April 5<sup>th</sup> 1909.

A ten days notice having been given I proceed to do the following work in section 8 Town 8 North Range 1 west  
Ran the boundary lines of 8. Thence ran the  $\frac{1}{2}$  mi lines  
through the center and established the center of said section

Chairmen	{ David Guy. Noah Shurell. }	Sworn
Flagman	Matthew Canada.	

Elihu Burkirk

M. C. S.



Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
6 A Catalpha	5-	N. 20 1/2 E.	87				
Catalpha	8-	S. 86. 2 W.	27 3/4				
B. Tr. Stone							
B. Walnut	5-	N. 60 1/2 E.	17				
B. "	3.	N. 85. W.	77 1/2				
G. limestone							
W. Oak.	5-	S. 9° W.	11 1/4				
W. Oak.	8.	S. 6° W.	19 2/3				
H. limestone							
Sugar.	18.	N. 73 3/4 E.	22 1/2 PK.				
"	14.	N. 38 E.	27. PK.				

May 29<sup>th</sup> 09

Quarter Survey in section 17. Town 4 N. R. 2 W.

A ten days notice having been given to Silas Wharton & Malissa Wharton by Mrs. George Carter I, after swearing in Ira McElroy & James Coffey as chainmen & Samuel Bose as flagman I made the following survey I found the  $\frac{1}{2}$  way point on the south side of the S.E.  $\frac{1}{4}$  of the N.E.  $\frac{1}{4}$  of and established a cor. thence ran north and found the  $\frac{1}{2}$  way point on the north side of said  $\frac{1}{4}$ ,  $\frac{1}{4}$  and established a cor. and established S. 5. rd. & 18  $\frac{1}{2}$  lk. East of T. according to deeds thence ran north to sect line and established cor. H. 34 rd. & 8 lk West of the N.E. cor. of section 17.

Elmer Buskirk

Mourne Co. Surveyor.





McGowan Survey.

July 26. 1910.

A ten day notice having been given to George McGowan by Mrs Kate McGowan I proceeded to make the following survey. in section 2. Town 10 N. R. 1 East with Walter Harding & John Bowman Jun. Chas. McDaniel and Harvey McDaniel all sworn. We commenced at the N. W. cor. of said section and found the half way point between said point and cor. "A" which is 80 rd East of starting point and planted a stone at the  $\frac{1}{2}$  way point. also two witness stones said stone is recorded as corner "V" thence we started South from said established stone and ran South 99 rd. and found the  $\frac{1}{2}$  way point and established cor. "W" also planted wit stones for same as the plat will show. also the - Township Book.

Elmer Buskirk

M.C.S.



R.

## FIELD NOTES.

	Witness Trees	Inches in Diameter	Bearings	Distances In Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A <sup>20</sup>								
B								
C								
D								
E								
F								
G								
H								
I								
J								
K								
L								
M								
N								
O								
P								
Q								
R								
S								
T								
U								
V								
W								
X								
Y								
Z								

I have been  
 in Maine &

1910

I ~~Elmer~~ ~~Bush~~ do solemnly swear that I will support the constitution of the United States and the constitution of the State of Indiana and that I will faithfully and impartially discharge the duty of deputy Surveyor of Monroe County Indiana, according to law to the best of my skill and ability - So help me God.

Elmer Bush

Subscribed and sworn to before me this the 27<sup>th</sup> Day of February 1911


Charles M. Bowers

This is to certify that I have this day appointed a true and lawful Deputy Surveyor in Monroe County Indiana

Charles M. Bowers



Survey of Section 30 T. 7 R. 2 E

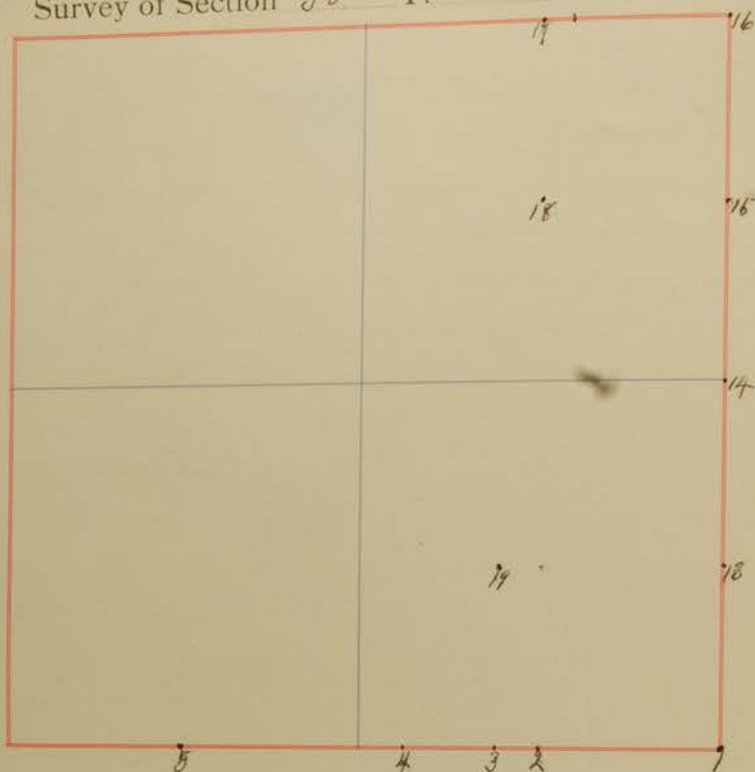

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A 1 Sandstone W. <sup>marked with</sup>		S 76° W	19	N.E. corner perpetuated			
2 Sandstone W.		S 77° E	11	16 1/2" Oak 4		S 79° W	14
B 2 Oak 8		N 3° W	5 1/2	Maple 2		S 38° W	7 1/2
3 Oak 6		S 11° W	26	80 rods W of N.E. corner			
4 Sugar 12		N 49 1/2° W	13	17 1/2" Oak 12		S 36° E	40 1/2
Bush 8		N 10° W	33 1/4	Bush 12		N 61 1/2° E	48
D 20 rods east of the S.E. corner				center of N.E. quarter perpetuated			
4 Persimmon 6		N 46 1/2° E	17 1/2	18 1/2" Elm 12		N 39° W	11
E Hickory 6		N 19 1/2° E	6	Bush 4		S 58° E	17
perpetuated the section cor of 30, 31.				20 rods W of the center of S.E. qtr			
F 5 Stone W. <sup>marked with</sup>		90° E	25	19 1/2" Hickory 4		S 10 1/2° W	24
W Oak 16		N 16 1/2° W	56	Poplar 10		S 78° W	36 1/2
C 1/2 distance bet S.E. corner & E 1/2 m.p.							
13 1/2" Gummore 5		S 16 1/2° E	20 1/4				
H Bush 12		S 66 1/2° W	37				
east 1/2 m.p. + on solid stone							
14 1/2" Ash 10		S 46° E	6				
Maple 7		N 66 1/2° E	33 1/2				
Bush 4		N 2 1/2° W	23				
1/2 distance bet N.E. corner & E 1/2 m.p.							
15 1/2" Basswood 6		N 30 1/2° W	11				
Bush 3		N 60° E	9				

Survey for Thomas Elkins et al in sec 30, 31, 32, T. 72 E.

Feb 6 We met pursuant to a ten days written notice  
1911. given to all interested parties, we organized  
by qualifying William Martin Michael Bridger  
chainmarkers and John Edwards flag bearer  
we then proceeded to make the following  
survey as per plat and notes, after working  
one day we adjourned for want of records  
Feb. 15 to meet Feb. 15, 1911. reorganized by qualifying  
1911. W.B. Browning chainmarker instead of William  
Martin we then proceeded as per plat and  
notes on pages 38, 39, 40.

I hereby certify the foregoing to be a true  
and correct report of the survey as made by  
me on the above dates as I verily believe


In witness whereof I attach my hand and  
seal

Charlie M. Bowers

Links to Diameter	Notes
corner	perpetuated
4	S 79° W
2	S 78° W
12	W of N. corner
12	S 38° E
12	S 61° E
12	N. corner
4	S 79° W
4	S 64° E
10	W of the center
4	S 116° W
10	S 79° W




Survey of Section 31 T. 7 R. 2 E

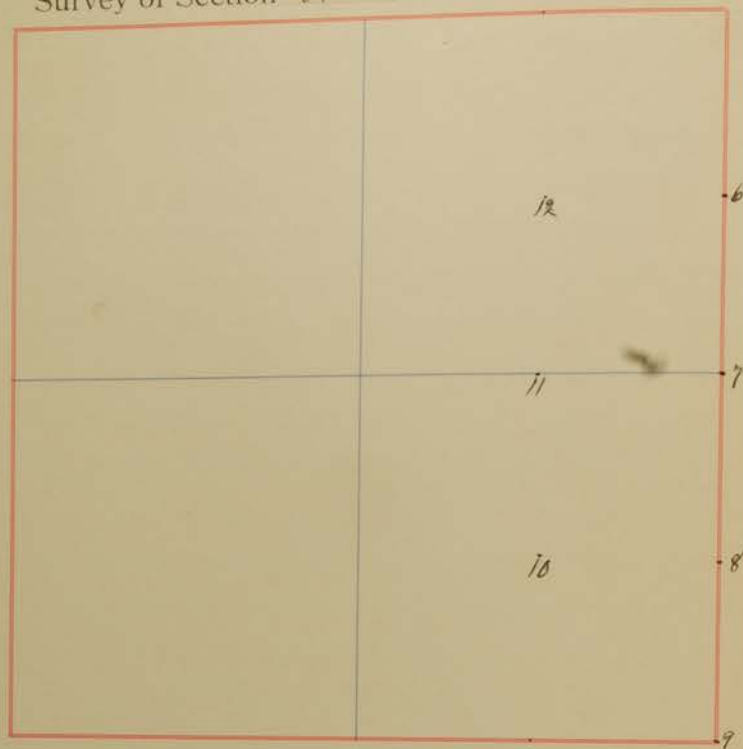

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A <sup>20</sup>		$\frac{1}{2}$ distance bet N.E. cor. & E. 1/2 mpt.					
B <sup>6</sup>	Beech 11	N 1 1/2° W	31 1/2				
B <sup>12</sup>	Oak 12	S 10° W	29 1/2				
		east 1/2 mpt. on solid ledge of stone					
C <sup>4</sup>	Hickory 4	N 32 1/2° W	4 1/2				
D <sup>7</sup>	Oak 6	N 70° W	18				
D <sup>3</sup>	Oak 3	S 32° E	22				
		$\frac{1}{2}$ distance bet S.E. cor. & E. 1/2 mpt.					
E <sup>8</sup>	Hickory 8	N 76° E	14				
F <sup>14</sup>	Hickory 14	S 46° W	13				
		section corner of section 31, T 32,					
G <sup>3</sup>	Lum 3	S 46 1/2° E	23				
G <sup>12</sup>	Oak 12	N 79° W	36				
		center of the S.E. quarter					
H <sup>14</sup>	Hickory 14	N 77° E	4				
H <sup>24</sup>	Oak 24	S 18° E	28				
		$\frac{1}{2}$ distance between E. 1/2 mpt. center					
I <sup>10</sup>	Aspen 10	S 40° W	43				
I <sup>2</sup>	Aspen 2	N 11 1/2° W	13				
		center of the N.E. quarter					
J <sup>20</sup>	Aspen 20	S 43° E	51				
J <sup>13</sup>	Walnut 13	70° W	30				

Survey of Section 32 T. 7 R. 1 E.

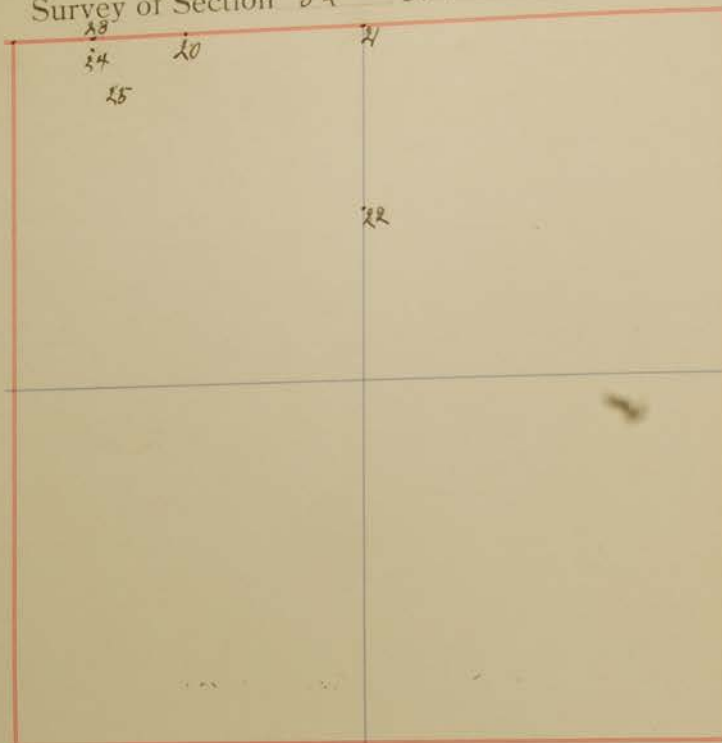


FIELD NOTES.

	Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A	$\frac{1}{2}$ distance between N.W. corner & N.E. corner							
20	W oak	12	N 47° W	44½				
B	W oak	12	N 86° E	64½				
	N ½ m p perpetuated							
C	21 Roak	12	N 22° W	11				
	W oak	2	S 66½° W	17				
D	$\frac{1}{2}$ distance bet. N. ½ m p & center							
22	Burshut	4	S 31½° W	8				
E	Burshut	3	N 63½° W	28				
	36 rods east of the N.W. corner							
F	23 Burshut	24	S 86½° E	178				
	4 rods S of a point 36 rods E of the N.W. corner							
G	24 Sycamore	24	N. 77½° E	79½				
	16 rods southwesterly from a point 4 rods S of a point 36 rods east of the N.W. corner							
H	25 Sycamore	6	S 22° W	28				
	W elm	2	N 1° W	27				




Survey of Section 31 T. 7 R. 2 E

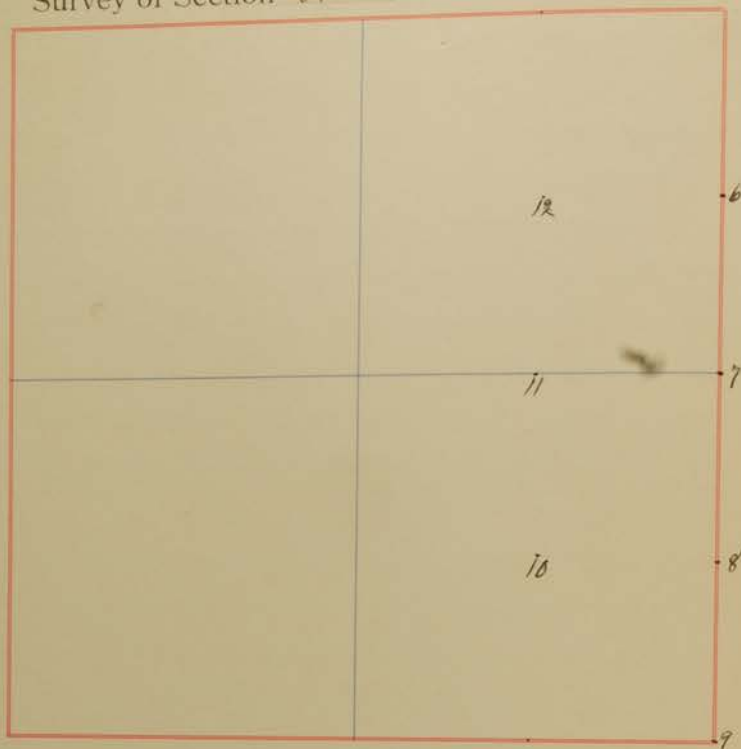

FIELD NOTES.

	Witness Trees	Inches in Diameter	Bearings	Distances in Links		Witness Trees	Inches in Diameter	Bearings	Distances in Links
A	$\frac{1}{2}$ distance bet N.E. cor. & E. 1/2 mpt.								
	Beech	11	N 1 1/2° W	31 1/2					
B	Oak	12	S 10° W	29 1/2					
	east 1/2 mpt. on solid ledge of stone								
C	Hickory	4	N 32 1/2° W	4 1/2					
	Oak	6	N 70° W	18					
D	Oak	3	S 32° E	22					
	$\frac{1}{2}$ distance bet S.E. cor. & E. 1/2 mpt.								
E	Hickory	8	N 76° E	14					
	Hickory	14	S 46° W	13					
F	section corner of section 31, T 32,								
	Sum	3	S 46 1/2° E	23					
G	Oak	12	N 79° W	36					
	center of the S.E. quarter								
H	Hickory	14	N 77° E	4					
	Oak	24	S 18° E	28					
	$\frac{1}{2}$ distance between E. 1/2 mpt. center								
I	Aspen	10	S 40° W	43					
	Aspen	2	N 11 1/2° W	13					
	center of the N.E. quarter								
J	Aspen	20	S 43° E	51					
	Walnut	13	70° W	30					

Survey of Section 32 T. 7 R. 1 E.

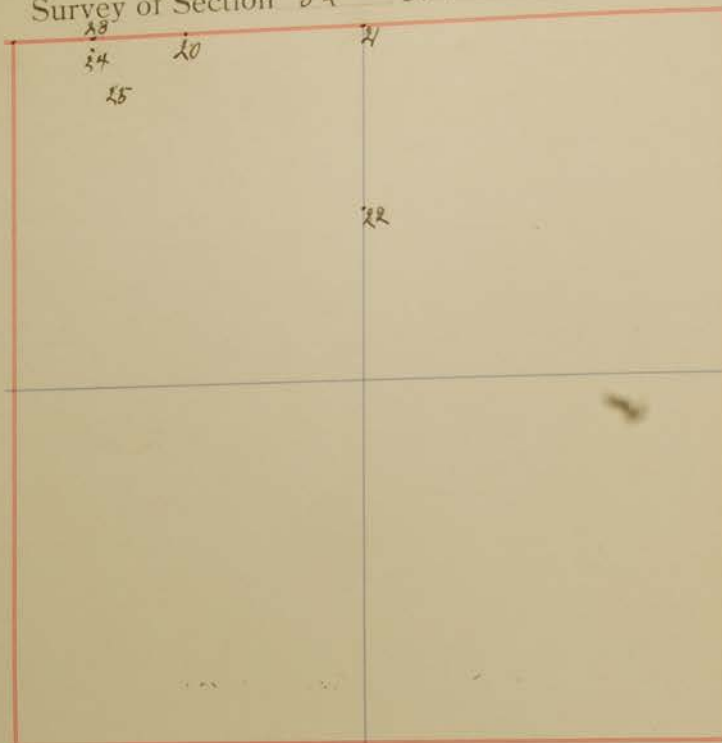


FIELD NOTES.

	Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A	$\frac{1}{2}$ distance between N.W. corner & N.E. corner							
20	Walnut	12	N 47° W	44½				
B	Walnut	12	N 86° E	64½				
	N ½ m p perpetuated							
C	Walnut	12	N 22° W	11				
	Walnut	2	S 66½° W	17				
D	$\frac{1}{2}$ distance bet. N ½ m p & center							
21	Walnut	4	S 31½° W	8				
E	Walnut	3	N 63½° W	28				
	36 rods east of the N.W. corner							
F	Walnut	24	S 86½° E	178				
	4 rods S of a point 36 rods E of the N.W. corner							
22	Walnut	24	N 77½° E	79½				
	16 rods southwesterly from a point 4 rods S of a point 36 rods east of the N.W. corner							
H	Walnut	6	S 22° W	28				
	Walnut	2	N 1° W	27				





Survey of Section 14 T. 10 R. 1E

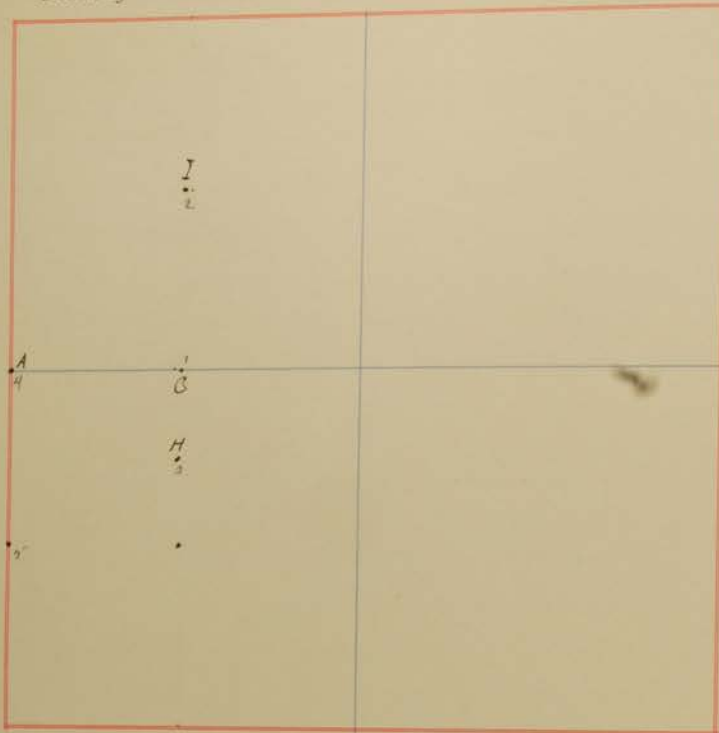

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A <sup>2</sup> 1/2 distance bet. W 1/2 m.p. and center							
C Elm	14	S 88° W	100				
B Sassafras	10	S 66° W	33				
center of the N. W. quarter							
D Ash	6	N 63 1/2° W	41				
Buck	20	S 62 1/2° E	66				
D Oak	6	S 66 1/2° E	46 1/2				
40 rods N of the center of S.W. qr.							
E Hyeamou	20	N 21 1/2° W	30				
F Walnut	18	S 32 1/2° E	49				
F Cherry	20	S 16 1/2° W	43				
perpetuated W 1/2 m.p.							
G Buck	6	S 26 1/2° E	32 1/2				
H Hickory	3	S 64° W	29 1/2				
H Oak	6	S 88° E	41				
1/2 distance bet W 1/2 m.p. & S.W. cor.							
I Elm	4	S 13 1/2° W	29				
J Sug	8	N 17° W	24 1/2				
K Sug	6	N 23 1/2°	27 1/2				




Survey for Regina Nerschetal in section 14 T 10 R 1 E

May 26<sup>th</sup> Legal notice having been given we met pursuant  
19 11. there to and organized by qualifying Howard  
Anderson, Richard Fomey chainmarkers, and Joseph  
Wilson flagman we then proceeded to make  
the following survey as per plat and notes  
in section 14 T 10 R 1 E.

I hereby certify the foregoing to be a true and  
correct report of the survey as made by me on the  
above date as I verily believe

In witness whereof I attach my hand and seal  
Charles M. Bowers

Survey of Section 27 T. 10 R. 1 E

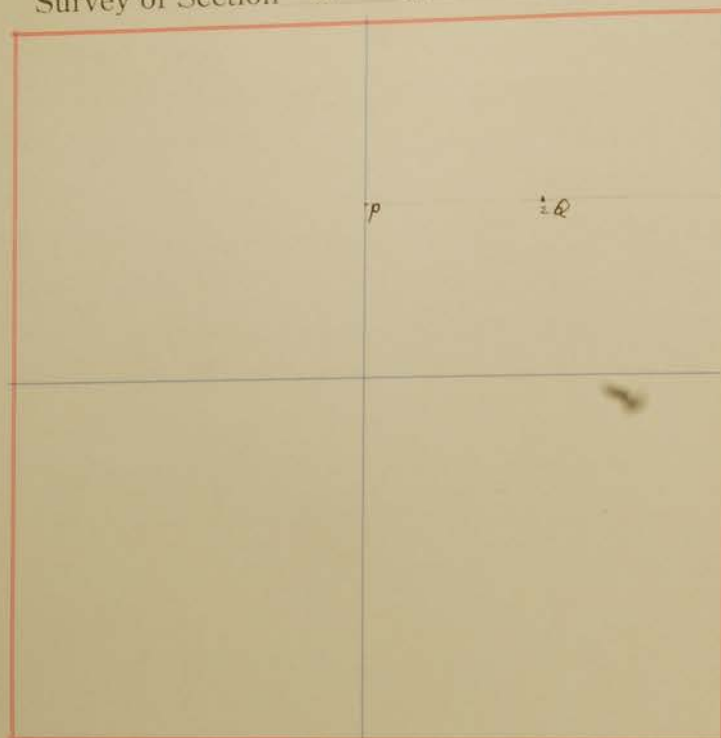

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A <sup>2</sup> $\frac{1}{2}$ distance bet N $\frac{1}{2}$ m p and center							
R oak	21	N 1° W	19 $\frac{1}{2}$				
B $\frac{1}{2}$ center of the N.E. quarter							
W oak	8	S 11 $\frac{1}{2}$ ° W	27				
C W oak	10	S 80° E	54 $\frac{1}{2}$				
Ach	13	N 46 $\frac{1}{2}$ ° E	26 $\frac{1}{2}$				
D							
E							
F							
G							
H							



Survey for E W White et al in section 27 T10 R1 E.

Aug 16 A ten days written notice having been given  
1911 & we met pursuant thereto and organized  
by qualifying Isaac Hartrock William O'G  
Lisher chainmarker Ora Mc Coy flagman  
we then proceeded to make the following  
survey as per plat and notes in section 27  
T10 R1 E.

I hereby certify the foregoing to be a true  
and correct report of the survey as made by  
me as I verily believe

In witness whereof I attach my hand and seal  
Charles M. Bowers

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
72 rods east of the N 1/2 m.p.							
1 Hickory	14	S 8 1/2° E	96				
1 Poplar	12	S 88° E	173				
2 72 rods east of the 1/2 mile bet N 1/2 m.p. & center							
2 Mulberry	5	N. 28° W	18 1/2				

A <sup>2</sup>	72 rods east of the N <sup>1</sup> / <sub>2</sub> m.p.			
	Nichory	14	S 8 <sup>1</sup> / <sub>2</sub> ° E	96
B	Paplar	12	S 88° E	173
	72 rods east of the 1/2 mile bet N <sup>1</sup> / <sub>2</sub> m.p. & center			
C	Mulberry	5	N. 28° W	18 <sup>1</sup> / <sub>2</sub>



Survey for L. E. Thrasher & Eli May in section 3 T 7 R 2 W

Oct 10  
1911

By agreement I met the above interested parties and made the following survey as per plat and notes, by agreement Eli May L. E. Thrasher were chain markers and Logan P. May L. Lagman

I hereby certify the foregoing to be a true and correct report of the survey as made by me as I verily believe

In witness whereof I attach my hand and seal  
Charles M. Bowers

[illegible]

I This the 2nd 1844  
shows no sign of  
with the survey of  
I think it is not in

Will I send you  
substantially discharge  
in the above sum  
I will so help me



April 2<sup>nd</sup> 1910

I this the 2<sup>nd</sup> day of April 1910 Deputize C. M. Bowers as Deputy Surveyor of the Survey & Ind. to make the survey for Batter & others in Town 8 North R. 1 East and section 18.

Elmer Bushnik  
M.S.

I do solemnly swear that I will faithfully and impartially discharge my duty as Deputy Surveyor in the above survey to the best of my tact and skill so help me God

L. M. Bowers

Survey of Section 3 T. 8 R. 12W.



FIELD NOTES.


Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
"I"		line stone one rod and 6 links east of South $\frac{1}{2}$ mi post.					
		wit. by a line stone South $16\frac{1}{2}$ lks.					
" "		" " " " North $16\frac{1}{2}$ lks.					
"F"		line stone one rod west of the $\frac{1}{2}$ mi line running through said section North & South.					
"K"		is 80 rd west of A. and the S. W. cor. of same. lot no 136					
		wit. by a line stone East $14\frac{1}{2}$ lks.					
" "		" " " " West $14\frac{1}{2}$ lks.					



By agreement of Emma Whetsell and Paris I made the  
 following survey, on the 31<sup>st</sup> of Dec. 1870. In section  
 3. Town 8 North Range 7 West as shown by the  
 plat as Chainmen { Hobart Buskirk  
                               Fred Buskirk

Oliver Buskirk  
 M. C. S.

Survey of Section 25 T. 9 R. 10

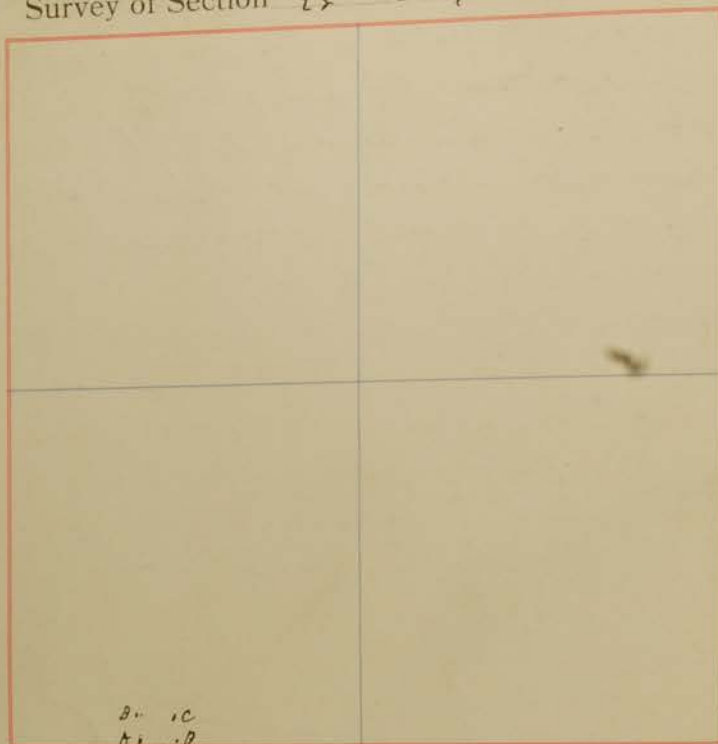

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
stone marked with +		S 34° E	54				
South W. cor of aranda		N 65½° E	98				
Apple tree	12	S 33° E	63				
B. walnut	10	S 41° W	54				
Poplar	12	S 39° W	54				
W. cherry	2½	N 41° W	5½				
Bearch	1½	N 67½ W	13½				

*Handwritten notes on the right margin of the page, partially visible. The text is written in cursive and appears to be a continuation of the survey notes or a separate entry. It mentions 'the survey of the land' and 'the survey of the land'.*



## Buskirk, Miller &amp; Robinson Survey.

Jan 16  
1913

A written ten days notice having been given to the interested parties to survey all lines and establish all corners necessary to establish the boundary line of the land of Lydia Buskirk in the south west quarter of section twenty eight town nine north range one west Monroe county Ind. we Charles R. Whitaker Jacob Miller & Milton Robinson met at the residence of Wm H Buskirk as designated in the notice the weather not being favorable to proceed with the survey we decided to set Monday Jan. 13, 1913 to meet and make said survey meet as agreed upon and organized by qualifying the following helpers Sherill Hazel assistant surveyor Charles M. Bowers flag man Haskel Turner chainman being short of help Charles M. Bowers and myself helped in carrying the chain we then proceeded to make the following survey as to plat and notes establish a corner at the intersection of the right pike and the south line of said south west quarter by driving an iron pin witnessed by a stone marked with a cross S  $34^{\circ}$  E 54 link and the south west corner of the stone foundation of the veranda of Wm H Buskirk N  $60\frac{1}{2}^{\circ}$  E 98 links established a corner in the center of the right pike said corner being 18 rods 10 ft north with the center of said pike of a point at intersection the south line of said quarter and the right pike witnessed by apple tree 12 in S  $33^{\circ}$  E 63 links established a corner 24 rods east of a corner 18 rd. 10 ft north with the center of the right pike of a corner at the intersection of said pike and the south line of said quarter witnessed by Walnut 10 in S  $41^{\circ}$  W 56 link and a Poplar 12 in S  $89^{\circ}$  W 46  $\frac{1}{2}$  links established a corner on the south line of said quarter 24 rods east of corner at the intersection of the south line of the said quarter and the right pike witnessed by W. Cherry 2  $\frac{1}{2}$  in N  $41^{\circ}$  W 5  $\frac{1}{2}$  link and beech 1  $\frac{1}{2}$  in N  $67^{\circ}$  W 12  $\frac{1}{2}$  links

I hereby certify the foregoing to be a true and correct report of the survey as made by me on the above date in witness whereof I attach my hand and seal.


Charles R Whitaker

M. C. S.

Survey of Section

T.

R.

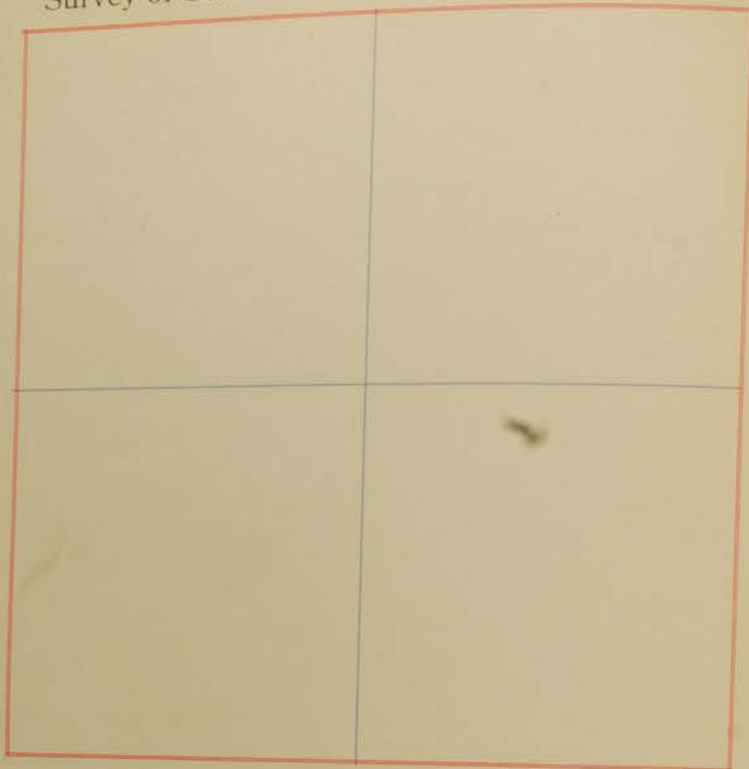

FIELD NOTES.

Witness	Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
2	stone m							
A	with							
1	South							
	of wa							
2	8 App							
C	ss B. m							
F	Pop							
	os Ak. c							
E	Dec							
A								
Q								
A								





Survey for Anna E. Barton and Carrie Slocum

February 17<sup>th</sup> - 1914

I this 17<sup>th</sup> day of February 1914 met the above interested parties or their representatives and made the following survey.

He established the corners of in lots No. 281 and 282 in the city of Bloomington Indiana and located and established the line between that portion of said in lots owned by Anna E. Barton and Carrie Slocum

Bert A. Cole  
Deputy

C. R. Whitaker  
County Surveyor

FIELD NOTES.							
Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
Apple Tree	8	N 26° W	17 links				
Sand stone		OK	17 "				

Sept 1911  
A. H. Hays, who has been  
served and qualified High  
Court of England / J. H. Hays, who  
has been served to  
plot and notice in which  
and on the account of our  
services till Oct 4  
survey is all on the  
shanty property the  
report of the survey  
has been



Sep 29.  
1913


A ten days notice having been given we met pursuant at the place designated and qualified Hubert Hanna as deputy surveyor Walter Borland flagman Asbury Burch and George Whitaker Chainmen proceeded to make the following survey as per plat and notice in section 32 T 8 R 2 W.

and on the account of not having records sufficient we dismissed till Oct 4 1913 then we met and made the survey as are on record.

I hereby certify the foregoing to be a true and correct report of the survey as made by me ~~very~~ verily believe

Hubert Hanna  
deputy surveyor

Survey of Section 21 T. 10 R. 1 W

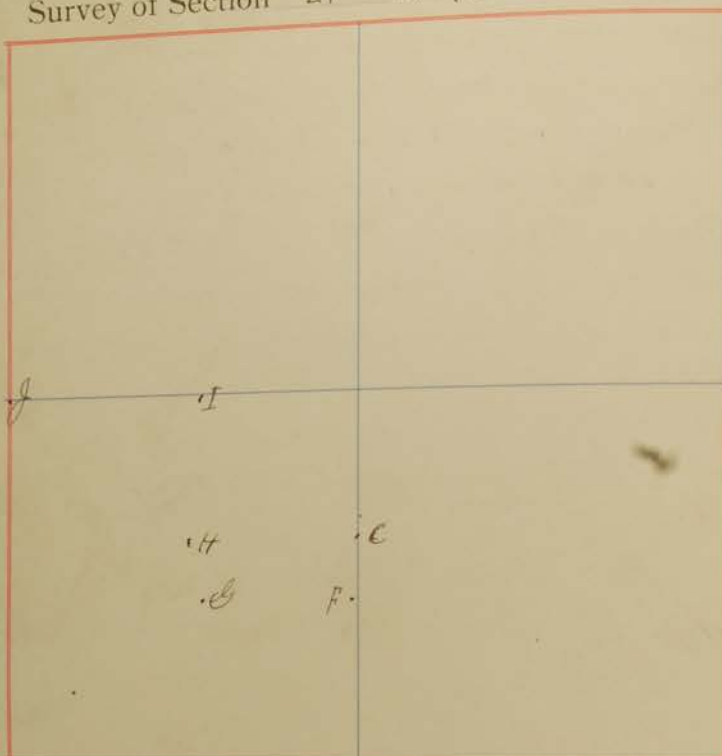

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
F		23 rods south 1 rod west of C				half distance bet $S\frac{1}{2}$ mile post and center	
Stone		south	20 lks				
Stone		west	20 lks	C		B Walnut 12 S 23 E	77 lks
		59 rods west of F		Stone		west	22 links
G		Stone North	20 lks				
Stone		East	20 lks				
H		Center of the S W $Q\frac{1}{4}$ Sect 21 T 10 R 1 W					
Stone		East	20 lks				
Stone		North	20 lks				
I		N. E. Cor west $\frac{1}{2}$ S.W. $Q\frac{1}{4}$ Sec 21 T 10 R 1 W					
Stone		South	20 lks				
Stone		west	20 lks				
		N. W. Cor W $\frac{1}{2}$ S.W. $Q\frac{1}{4}$ Sec 21 T 10 R 1 W					
Stone		East	20 lks				
Stone		South	20 lks				



Feb 12  
1914

A written ten days notice having been given I met at the pointed time and place and organized by qualifying Walter Collier Roy Robinson chairman and M. L. McNeely flagman & we then proceeded to make the following survey in Sec 21. T10 R1 N. as per plat and notes then we had to discontinue on the account of snow and then met on the third of March 1914

William J Burch  
Deputy Surveyor.

I this the first day of Jan 1915. Duplicates to Mr. Bowers as  
Deputy Surveyor of Monroe Co. Ind.

Elmer Burkitt

County Surveyor

I do solemnly swear that I will faithfully discharge  
my duties as Deputy Surveyor to the best of my tact  
and skill so help me God.

L. M. Bowers

R.

## FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
"A" walnut	14	South 55° East	20 feet	Elm.	24	North 16° West	53 $\frac{3}{4}$ ft.
"B" Cross on a stone bldg.		North 36° West	68 $\frac{2}{3}$ feet	Sugar	8	South 35° West	49 $\frac{3}{4}$ ft.

July 12<sup>th</sup> 1877  
In agreement I established the  
the town of Stinsonville Iowa  
we consider at either end of  
Mason, John W. Baker & Co.



July the 22<sup>nd</sup> 1915-

By agreement I established the line between 67 & 68, lots in the town of Stinesville Monroe Co. State of Indiana by establishing two corners at either end of said lots. as per plot.

Chairmen, John M. Baker & W. E. Dunning Esqrs.

Oliver Buskirk

Monroe Co. Surveyor.

Hand-drawn map of a city block with six lots numbered 1 to 6. The lots are arranged in two columns of three. The left column is labeled 'B' and the right column is labeled 'E'. The street on the right is labeled 'Walnut Street'. The street on the left is labeled '10th'. The street at the top is labeled '5th'. The street at the bottom is labeled '6th'. The lots are numbered 1 to 6 from bottom to top. The dimensions of the lots are given in feet: Lot 1 is 46 ft wide; Lot 2 is 62 1/2 ft wide; Lot 3 is 62 1/2 ft wide; Lot 4 is 64 1/2 ft wide; Lot 5 is 52 1/2 ft wide; Lot 6 is 46 ft wide. The total width of the block is 330 ft.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
---------------	--------------------	----------	--------------------	---------------	--------------------	----------	--------------------

2. "A" N.E. cor. of Out lot No 34. A cross in  
 "B" is a gas pipe driven at a point  $203\frac{1}{2}$  ft South &  $132$  ft west of the N.E. cor. of Out lot No 34.  
 "C" is a cross in a concrete drive way  $203\frac{1}{2}$  ft South of the N.E. cor. of Out lot No 34.  
 "D" is a gas pipe driven for the S.E. cor. of Out lot No 34  
 "E" is a gas pipe driven at a point  $148\frac{1}{2}$  ft S. of N.E. cor. of out lot No 34.  
 "F" is a gas pipe driven at a point  $132$  ft West of "E" and  $165$  ft. south of  $\frac{1}{2}$  section line

all owners of  
 Blounting,  
 by statute of  
 perpetuate  
 number 34  
 in said case  
 on the 22nd  
 and how  
 as follows  
 Trustees  
 represent  
 attorney  
 Charles A. Se  
 represented  
 Nettie E. Jones  
 Civil Engineer  
 F. B. Jones  
 W. Jones  
 William L.  
 Anna E. Jones  
 Assisted  
 City Civil E  
 locate and  
 corners of  
 bound area  
 a part of  
 all other



## Lila B. Loudon Survey.

Met, pursuant to notice given, on the 3<sup>rd</sup> day of Aug. 1915 and made the following survey. We proceeded to find the  $\frac{1}{2}$  section, running E. & W. along 10<sup>th</sup> street of Bloomington, Monroe Co., Ind. also the center line of Walnut St. From these two lines by actual measurement we established "A" "B" "C" "D" "E" & "F".

Chairman { Engineer Fanna Wanner.  
Prof. Hanna.

Elmer Burkirk

Monroe Co. Surveyor.

all owners of parts of the East  $\frac{1}{2}$  of Out lot No. 34 in Bloomington, Ind., having been notified in writing as required by statute of the purpose of this survey, namely to relocate and perpetuate the Southeast and Northeast corners of said outlot Number 34, and the lines bounding the property of Lila B. Loudon, in said east half of said outlot 34, and designated on the accompanying plat as #4, and also as to the date and hour, were present, either in person or by representatives as follows:-

Trustees United Presbyterian Church - owners of Tract #1, represented by James N. Blair, Trustees and James W. Blair attorney

Charles A. Sears and Fannie J. Sears, owners of tract No. 2 represented by William H. Sears, their son.

Nettie E. Johnson, owner of Tract No 3. represented by Prof. H. Hanna Civil Engineer.

Lila B. Loudon, owner of tract #4. represented by William N. Loudon.

William L. Payne, owner of tract #5. present in person.

Anna E. Greaves, owner of tract #6, represented by H. A. Actell.

Assisted by City Civil Engineer Danner and former City Civil Engineer, Prof. U. D. Hanna. I proceeded to locate and did locate the Northeast and Southeast corners of out lot # 34. in Bloomington, Ind, and the boundaries of the tract #4. owned by Lila B. Loudon, a part of said out lot # 34. as shown on the accompanying plat, "A" "B" "C" "D" "E" and "F".


Dated this 3<sup>rd</sup> day of August 1915.

Elmer Burkirk

Monroe Co. Surveyor.



Survey of Section 45.8.9 T. 10 R. 2. W.

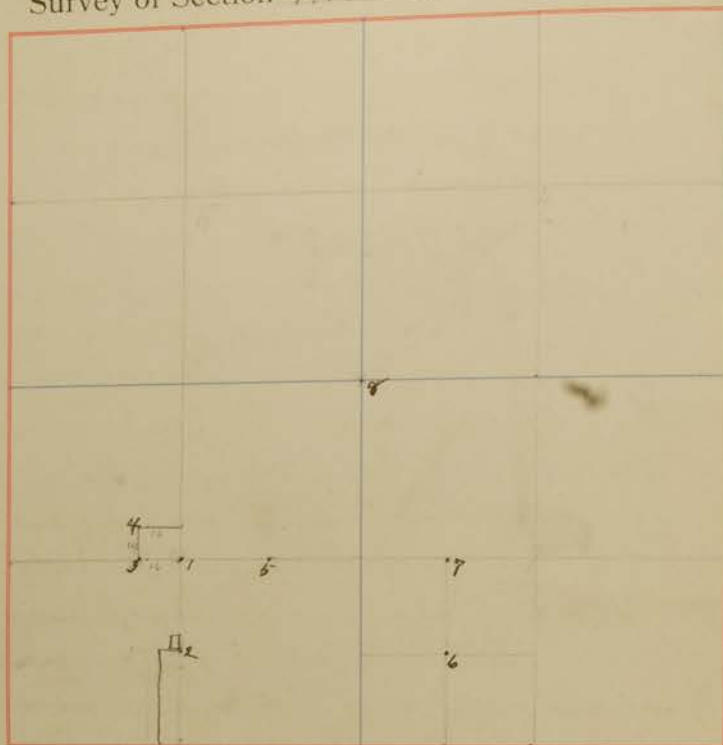

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
2. N. West foundation		N 36° E	62				
3. Mulberry	6	S 64° E	10 8				
4. Hickory	6	S 63½° W	29				
5. Ash	4	S 10° W	60½				
6. Hickory	12	S 80° E	32				
7. Poplar	12	N 45° E	137				
8. Birch	14	N 75½° E	25				
9. Sugar	6	S 69° E	40				
10. Elm	12	S 26° E	42½				
11. Oak	10	N 0°	34¾				
12. Cedar	12	N 39° E	76¼				
13. Cypress	4	N 66½° E	23¼				
14. Apple	14	N 73½° E	22				
East of RR track			41				
15. S. Stone in open ground							
no witnesses							



## Downs Shultz &amp; others

April 26<sup>th</sup> 1915


A legal notice having been given we met pursuant thereto and organized by qualifying Raymond Heland and George Schultz chaincarriers, and Hamilton Berry flagman, we then proceeded to make the following survey in sections 14, 15, 18, 19, T 10 N. R 2 W. as per plat and notes

I hereby certify the foregoing to be a true and correct report of the survey made by me on the above date as I verily believe

In witness whereof I attach my hand and seal

Charles M. Bowers  
Deputy

Survey of Section 28 T. 10 R. 1 W.

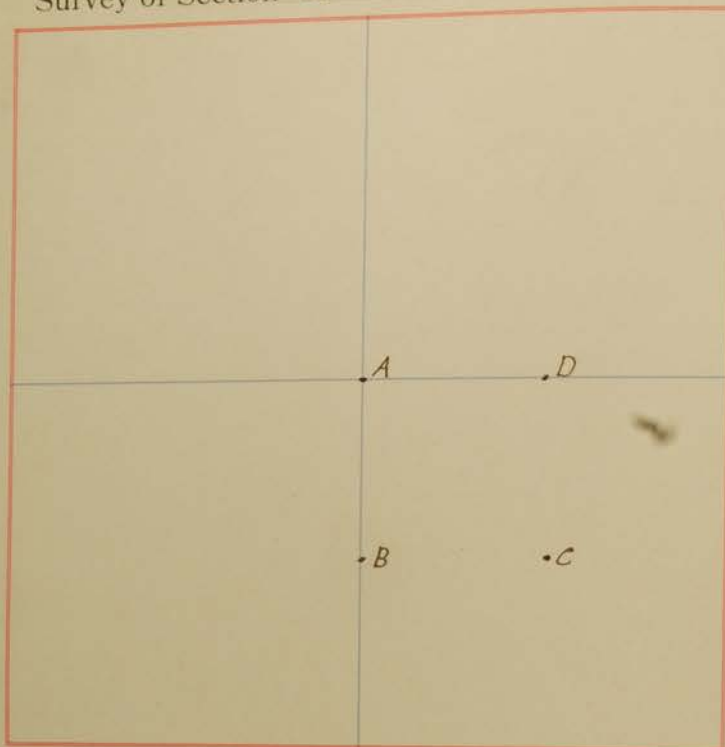

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A Elm	8	S 63 1/2° West	44				
Iron pine		S 5 1/2° East	29				
B Stone	6x6x12	N 26° East	30				
B Walnut	6	S 83° East	20				
C B Walnut	6	N 16° East	50				
"	8	N 20° West	75				
D Stone	6x6x20	N 36° West	58				
D Sugar	6	N 25° West	53				
Stone		East	39				



## Baugh Smith and Jones Survey

June 5<sup>th</sup> 1916

A written ten days notice having been given we met pursuant thereto and organized by qualifying Jessie Jones, Harley Hultenburg chain carriers and M. L. McKeely flagman, we then proceeded to make the following survey in Section 28 T. 10. R. 1 West as per plat and notes

I hereby certify the foregoing to be a true and correct report of the survey made by me on the above date as I verily believe

In witness whereof I attach my hand and seal

Charlie M. Bowers  
Deputy Surveyor  
Monroe County  
Indiana


Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
a. Stone	2 1/2	—					
b. Stone	"	—					
c. Stone	"	—					
d. Stone	"	—					

From  
his well-wishers  
establishing the  
from this line  
perpetual source of  
for their respect  
and



From two stones on the N. property line of the Smellwood Sub-division run the line west establishing the N. Property line of lot #20, and from this line measured 138 ft. on the East and West property lines of lot #19, setting stones a and b, thence N on these respective lines 207 ft. setting stones c and d.

Survey of Section 16 T. 9 R. 1 E

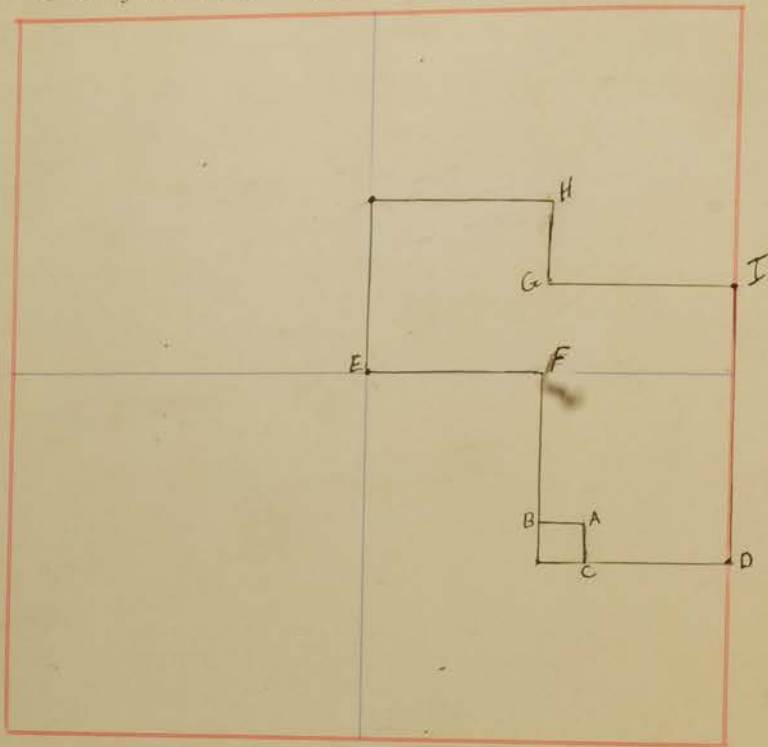

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A Hickory	10"	N 63° E	108.44				
" "	10"	S 74° E	85.3"				
B Chest. Oak	6"	S 65° E	3' 4"				
B Oak	6"	N 1° E	8' 2"				
C Hickory	7"	N 62° 30' E	68' 9"				
Chestnut	8"	N 17° 30' E	58'				
D B. Oak	10"	N 18° W	14'				
W Oak	9"	N 5° W	33' 4"				
E B. Oak	6"	N 25° E	77' 10"				
F Chest Oak	16"	N 16° E	32' 5"				
B. Oak	3"	S 48° E	2'				
G B Oak	5"	S 35° W	2' 5"				
W Oak	3"	N 15° W	10' 5"				
H Hickory	8"	N 51° 30' E	3'				
I Chest Oak	6"	S 25° W	8' 9"				
Chest. Oak	4"	N 24° W	3'				




A written ten days notice having been given we met pursuant thereto and organized by qualifying Ben Paton and Wm Smith as chain carriers and J. B. Chambers, head flagman and Leonard Johnson back flagman and then proceeded to make the following survey running the following lines and establishing the following corners, to wit: After finding the SE corner of Section 16, T. 7, 1 E and a stone <sup>at the</sup>  $\frac{1}{4}$  mi post N, we prolonged the line and located corner I 120 rods north of H, then from H west to center of SE  $\frac{1}{4}$  where we located corner by witness trees, corrected back and established the the South line of the NE  $\frac{1}{4}$  of the SE  $\frac{1}{4}$  of Section 16; then ran N to Stone center of NE  $\frac{1}{4}$  of Sec. 16 corrected back and located B, F and G, thence W from H to  $\frac{1}{4}$  Sec. 1  $\frac{1}{4}$  mi and found corner stone, Thence South to center of Section, thence East to F  $\frac{1}{4}$  mi. Then from the center of the S.E.  $\frac{1}{4}$  we began of a 4 acre tract in the SW corner of N.E.  $\frac{1}{4}$  of the SE  $\frac{1}{4}$  of Sec 16 making it a square  $\frac{1}{4}$  acre. We established the corners as shown on plat; Time  $4\frac{1}{2}$  days.

Chairman { Ben Paton  
Wm Smith  
Flagmen { J. B. Chambers  
Leonard Johnson

In witness whereof I attach my hand and seal this the 7th day of May 1917.

Hobart Van Buskirk  
Deputy Surveyor,  
Monroe County,  
Indiana.

Survey of Section 21 T. 8 R. 1 E

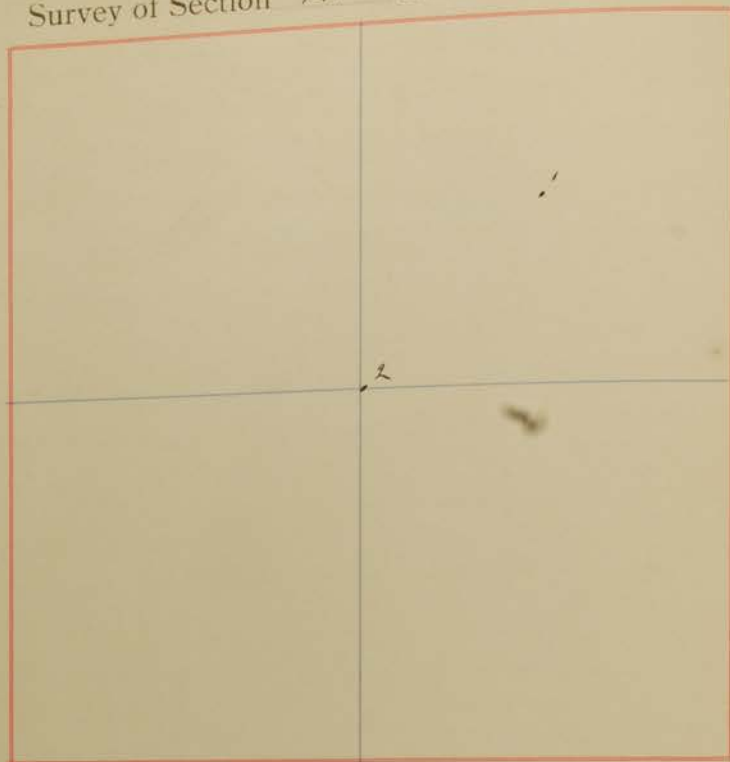

FIELD NOTES.

W	Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A	Stone		East	10				
B	Ash	14	S 88° E	49½				
C	Oak	10	N 77° W	26				
D								
E								
F								
G								
H								
I								
J								
K								
L								
M								
N								
O								
P								
Q								
R								
S								
T								
U								
V								
W								
X								
Y								
Z								



# Film and Mail

Sept 7<sup>th</sup> 1916


Legal ten days written notice having been given we met pursuant thereto and organized by qualifying  
 bharley Fry James b hestnut chain carriers  
 Falden Stephenson flagman.

We then proceeded to make the following survey  
 as per plat and notes, in section 21 T 8 R 1 E  
 established a stone at the center of the N. E. quarter  
 witnessed by. Stone East 10 lks.

perpetuated the center of said section by marking  
 { Ash 14" S. 88° E. 49½ lks  
 { Black oak 10" N. 77° W 26 lks.

b M. Bowers

Survey of Section 21 T. 8 R. 2 W

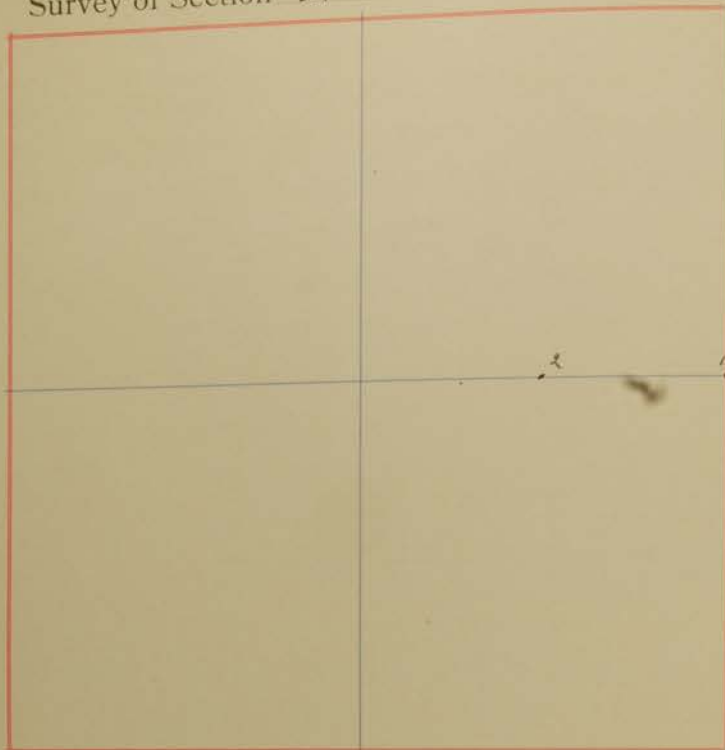

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A. B. Walnut	13	S 54° E	8 1/2				
C. Sugar	16	S 87° E	115				
D. Oak	12	South	26				
E.							
F.							
G.							
H.							
I.							
J.							
K.							
L.							
M.							
N.							
O.							
P.							
Q.							
R.							
S.							
T.							
U.							
V.							
W.							
X.							
Y.							
Z.							

Transfer  
Aug 9 1916  
By agreement of  
and others on the  
South of the  
to the  
the then proceed  
as per plat and  
established the  
B. Walnut 13"  
Sugar 16"  
perpetuated the  
and with 1/2 m.p.  
Oak 12"



# S Tansifer and Stephens

Aug 9 1916

By agreement I met Ira S Tansifer Smith Stephens and others, on the above date organized by qualifying Smith Stephens Ira S Tansifer shammen

A. C. Stephenson flagman.

We then proceeded to make the following survey as per plat and notes in section 21 T 8 R 2 W established the east  $\frac{1}{2}$  m. p. witnessed by.

{ B Walnut 13" S  $54^{\circ}$  E 8  $\frac{1}{2}$  lks

{ Sugar 16" S  $87^{\circ}$  E 115 "

perpetuated the  $\frac{1}{2}$  distance between the center and east  $\frac{1}{2}$  m. p. witnessed by.

{ W oak 12" S 26 lks

C. M. Bowers

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
1. Hycamore	8	S 72½° W	47½				
2. Elm	48	S 60° E	16½				
3. Wateroak	3	S 7½° E	40				
4. "	4	S 2½° W	46½				
5. Sycamore	6	N 50° E	4				
6. Ash	3	S 2° W	24½				

2	A	Hyecamore	8	S 72½° W	47½
2	B	Colm	48	S 60° E	16½
1	B	Wateroak	3	S 7½° E	40
1	C	"	4	S 2½° W	46½
8	C	Neckony	6	N 50° E	4
1	C	Atch	3	S 2° W	24½



## Mose S Ryans et al

Apr 13<sup>th</sup> 1915

By agreement I met Mose S Ryans, Frank Rogers, Cornelius Lenty, George J Lenty and H F Simmons and made the following survey on above date in section 36 T 10 R 1 W. as per plat and notes we had for assistants Cornelius Lenty Haskel Turner chammern, Narden Pauley flagman.

We then proceeded to make the following survey established the <sup>each</sup>  $\frac{1}{2}$  m.p. witnessed by.

1 { 6 yeamore 8" S  $72\frac{1}{2}^\circ$  W  $47\frac{1}{2}$  lks.

elm 48" S  $60^\circ$  E  $16\frac{1}{2}$  "

This stone is 25 lks N of the proper place to get it out of the branch

perpetuated the N.E corner by marking

2 { water oak 3" S  $7\frac{1}{2}^\circ$  E 40 lks

water oak 4" S  $2\frac{1}{2}^\circ$  W 46 "

established a stone at the  $\frac{1}{2}$  distance between the N.E. corner and  $\frac{1}{2}$  m.p. witnessed by

3 { Hickory 6" N  $50^\circ$  E 4 lks

Ash 3" S  $2^\circ$  W  $24\frac{1}{2}$  "

L. M. Bowers





N. P. Thomas N. S. Skirwin & al

Feb. 18<sup>th</sup> 1916

Legal notice having been given we met pursuant thereto and proceeded by qualifying N. S. Skirwin & M. Nash examiners N. P. Thomas flagman.

We then proceeded to make the following survey as per plat and notes in section 31 T 7 R 1 E

established a stone at the center of the S.E. quarter witnessed by.

1 { Spruce 12" N 13½° W 9½ lks

2 { Gum 6" N 1½° W 42 lks

3 { Hickory 4" at 42° E 18 "

established a stone at the ½ distance between the S.E. and S ½ m.p. witnessed by.

1 { Birch 10" S 70° E 36¾ lks

2 { Oak 12" S 54° E 4½ "

established a stone at the ½ distance between the E ½ m.p. and the center witnessed by.

1 { Oak 36" S 79° E 92 lks

2 { Hickory 24" S 45° E 49½ "

C. M. Bowers

Survey of Section 17 T. 7 R. 2 W.

## FIELD NOTES.

FIELD NOTES.							
Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A							
L							
B							
C							
D							
E							
F							
G							
H							
I							
J							
K							
L							
M							
N							
O							
P							
Q							
R							
S							
T							
U							
V							
W							
X							
Y							
Z							



## McBonnell Graves &amp; Wiener

June 22<sup>nd</sup> 1916

Survey for L.W. McBonnell, Lina Graves, and S.M. Wiener. written 10 days notice having been given we met pursuant thereto and organized by qualifying Eril Roonty Willard Baker chairman, and Mart Loomichael flagman. We then proceeded to make the following survey as per plat and notes in section 17 S 7. N. R. 2 W. perpetuated the E 1/2 m.p. by marking new corners

1 { Hickory 10" S 57 1/2° E 10 1/2 lks. Beech 18" N 4 1/2° W 54 lks.  
perpetuated the 1/2 dis between E 1/2 m.p. and center witnessed by.  
2 { Poplar 6" N 7 1/2° W 32 lks. Oak 4" N 40° E 25 1/4 lks.  
established the center witnessed by.

3 { B. walnut 6" N 2° E 66 lks. Sandstone 8 x 8" W 80° 26 1/2 lks  
perpetuated the 1/2 dis between W 1/2 m.p. and center witnessed by  
4 { B. walnut 10" E 14 1/2 lks. B. walnut 12" N 19 1/2° W 29 lks  
established a stone 30 rods E of the 1/2 dis between the W 1/2 m.p. & center witnessed by  
5 { B. walnut 6" S 52 1/2° E 70 1/4 lks. Sugar 24" N 82 1/2° W 46 lks.

By agreement we then adjourned until Sept 6 1916 reorganized by qualifying Chas. Graves, L.W. McBonnell chairman. We then proceeded to establish the following

established a stone at the 1/2 dis between the S 1/2 m.p. and S.E. corner witnessed by  
6 { B. walnut 6" S 25° W 11 lks. Elm 20" S 20° E 106 lks.

established a stone at the S 1/2 m.p. witnessed by

7 { Sandstone S 89° E 19 lks

established a stone at the center of the S.E. quarter witnessed by

8 { Beech 10" N 88° W 116 3/4 lks. Sugar 6" S 46° E 38 1/2 lks

established the 1/2 dis between the center & S 1/2 m.p. witnessed by.


9 { B. walnut 5" S 42° E 31 1/2 lks. B. walnut 5" S 71 1/2° E 65 lks

established a stone 50 rods W. of the 1/2 dis bet. the center and S 1/2 m.p. witnessed by

10 { B. walnut 14" N 88° E 106 lks. Elm 4" N 10 1/2° W 16 3/4 lks.

L.M. Bowers

Survey of Section 22 T. 8 R. 2 W

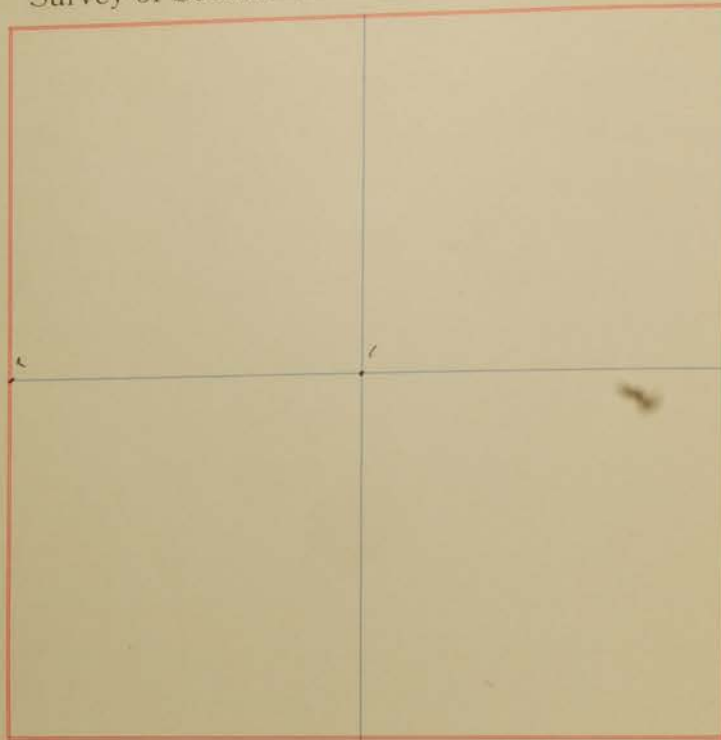

FIELD NOTES.

Witness Trees	Inches in Diameter	Bearings	Distances in Links	Witness Trees	Inches in Diameter	Bearings	Distances in Links
A	SE corner of	N. 80° W	57 1/4				
A	limestone marked	S 36 1/2° W	38				
B	sandstone W.	S 1° W	62 1/2				
C	limestone	S 21° E	47				
D							
E							
F							
G							
H							
I							
J							
K							
L							
M							
N							
O							
P							
Q							
R							
S							
T							
U							
V							
W							
X							
Y							
Z							



Gas Brown and Lyman Dunlap

Apr. 6<sup>th</sup> 1916

Legal 10 days notice having been given we met pursuant thereto and organized by qualifying Isaac Dunlap Gas Brown chairman, See Shrasher flagman. We then proceeded to make the following survey in section 22 T 8 R 2 W as per plat and notes perpetuated the center by making new witnesses.

- 1 S.E. corner of graustone N. 80° W 57½ lks
- 1 sandstone marked W S 36½ W 38 "
- established the W ½ m.p. witnessed by
- 2 limestone S 1° W 52½ lks
- 1 limestone S 21° E 47 lks

E. M. Bowers

[illegible]

James T 2  
April 11<sup>th</sup> 1916  
Legal notice  
we met persons  
Joseph James  
Flagman and  
surrey as per  
perpetrated the  
buried at 27<sup>th</sup> St  
established the  
road 18<sup>th</sup> & 8<sup>th</sup>



Jones T Lanam

April 11<sup>th</sup> 1916

Legal notice having been given to the interested parties we met pursuant thereto and organized by qualifying Joseph Jones, Jim Lanam Chammes, M. C. Mectally layman we then proceeded to make the following survey as per plat and notes in section 30 S 10 R. 1 W perpetuated the  $\frac{1}{2}$  distance between the E  $\frac{1}{2}$  m p and center witnessed by Turkey oak 27° N 24° W 75½ lks; stone East 35 lks established the center witnessed by Turkey oak 18° S 80° E 16 lks

L. M. Bowers

Survey of Section

T.

R.

Bloomington, Indiana

February 1<sup>st</sup> 1923.

To *James H. Nolan,*  
Bloomington, Indiana.

You are hereby notified that the Roadley Stone Company, an Indiana Corporation, desires to establish, re-locate and perpetuate the Southwest and Northwest corner stones of Seminary Lot Number Sixty-three (63), in the city of Bloomington, Indiana, and to establish the proper line between your property and the Roadley Stone Company property, your property being described as follows, to-wit: Beginning at the Southwest corner of Seminary Lot Number Sixty-three (63), in the City of Bloomington, Indiana, running North One hundred Sixty-eight (168) feet, thence East Two hundred Nine (209) feet, thence South One Hundred Sixty-eight (168) feet, thence West Two hundred Nine (209) feet, to the place of beginning; which survey is made for the purpose of locating the North line of the aforesaid described real estate, and also the South line of the following described real estate owned by the Roadley Stone Company in Bloomington, Indiana, to-wit: Part of Seminary Lot Number Sixty-three (63), in the city of Bloomington, Indiana, bounded as follows, to-wit: Beginning at the Northwest corner of said Seminary Lot Number Sixty-three (63), running thence South Two hundred Sixty-six and one-half (266½) feet, thence East Two hundred Nine (209) feet, thence North Two hundred Sixty-six and one-half (266½) feet, to the North line of said Seminary Lot, thence West Two hundred Nine (209) feet to the place of beginning.


You are hereby notified that on the 23<sup>rd</sup> day of February, 1923, *at ten o'clock A.M.* that County Surveyor will make such survey to locate the Northwest and the Southwest corner stones of Seminary Lot Number Sixty-three (63), in the City of Bloomington, Indiana, and also to locate the North line of your property hereinbefore described and the South line of the Roadley Stone Company property, hereinbefore described, and you are hereby notified to be present to look after your interest on said 23<sup>rd</sup> day of February, 1923, when said survey will be made.

*Roadley Stone Company*  
By *J. W. Roadley Secy.*



# Hoadley and Nolan

I was notified that, ~~that day~~ from date (Feb. 10, 1923), the Hoadley Stone Co a corporation of Indiana wished a survey to Relocate and Perpetuate the Southwest and Northwest corner stone of Seminary Lot #63 in the City of Bloomington Ind. Also to relocate the following described real estate of James H. Nolan in order to establish the North boundary line of the Hoadley Stone Co; Beginning at the Southwest corner of Sem. Lot #63, in the City of Bloomington Ind. running North one hundred sixty-eight (168) feet, thence East two hundred nine (209) feet, thence South one hundred sixty-eight (168) feet, thence West two hundred nine (209) feet to the place of beginning.

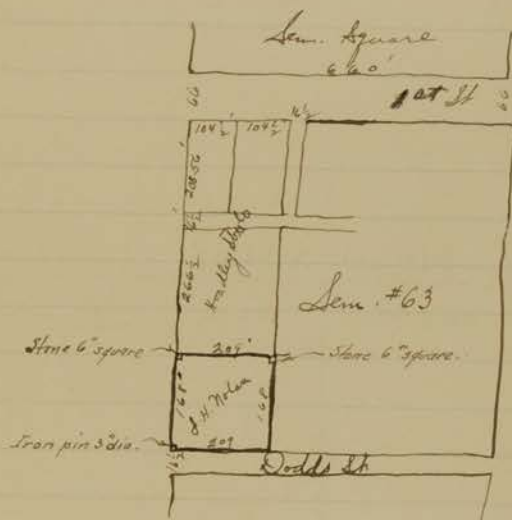

Made the above survey on Feb. 23, 1923, with the assistance of Prof. W. S. Hanna ex. County Surveyor; establishing the Southwest corner of Seminary Lot #63 (an iron pin 3' in dia) also setting corner stones (6\"/>

Signed Howard Chestnut  
Co. Surveyor

copy

November 20, 1947

Lora Lucas-513 W. Wylie St.  
Bloomington, Indiana.

You are hereby notified that I, the undersigned, having been duly deputized by the County Surveyor to make a land survey of lands in accordance with a notice forwarded to you by Vasil Young and Lavina Young of lands in the northeast quarter of section 32; T8N; R1W, will start said survey on Monday December 1, 1947 at the hour of 8.00 A.M. This notice shall continue day to day at the hour of 8.00 A.M. in case that is impossible to start said survey on December 1, 1947.

Clark D. Cebek  
Licensed Engineer #1996.



copy

Willoughby A. & Oma O. Wellons  
Frederick Blaine Decker  
Wanda E. Deckard  
Ota O. & James Polley

You, and each of you, are hereby notified that I, the undersigned, having been duly deputized by the County Surveyor to make a land survey of lands in accordance with a notice forwarded to you by Joseph & Pauline Richardson, -Charles & Opal Robinson and Valmah D. & Wreather M. Kuhnes of lands in the southwest quarter of section 18 T9N; R1E; will start said survey on Monday December 29, 1947 at the hour of 8:30 A.M. This notice shall continue from day to day at the hour of 8:30 A.M. in case that it is impossible to start said survey of December 29, 1947.

*B. J. Colbert*

Licensed Engineer #1996

July 19, 1948

To Whom it May Concern:-

This is to notify the property owners in the Southwest quarter of section 4 and in the southeast quarter of section 5 all in T10N;R1W-Washington Township, Monroe County, Indiana, that I, the undersigned, do hereby appoint and authorize Burt C. Stevenson a licensed engineer in the State of Indiana to act ~~as~~ as deputy surveyor in surveying out and establishing the ~~xxx~~ property lines involved and set out in the notice of James A. Leavitt-et al to Robert E. Long et al on April 13, 1948.

*Burt C. Stevenson*  
County Surveyor

August 20, 1951

To Whom it may Concern:-

This is to notify the property owners adjacent to Lot number 94 in Maxwell Manors Addition to the City of Bloomington, Indiana, that I the undersigned, do hereby deputize, appoint and authorize Mr. Ross Buck, a licensed civil ~~engineer~~ engineer in the State of Indiana to make a legal survey of said Lot number 94 in the Maxwell Manors Addition to the City of Bloomington, Indiana and by which survey he shall establish the property lines involved and set out in the notice issued by Walter C. Homan and Mary E. Homan to Richard D. Darby and Joanne Darby on the 11th day of August, 1951.

\_\_\_\_\_  
Monroe County Surveyor



December 2, 1964

Mr. Ross M. Brummett  
and  
Mrs. Edna M. Brummett  
110 East 15th Street  
Bloomington, Indiana.

In compliance with the enclosed Legal Notice, you are hereby advised that I will make this survey on December 14, 1964, at 10:00 o'clock A.M.

If inclement weather prevents this action, on the above given date and time, I will set a future date for future action.

*John T. Stapleton*  
Monroe County Surveyor

December 14, 1964

TO WHOM IT MAY CONCERN:\*

I made survey in accordance with the above notice, and established 2 corners for the northeast corner of the Brummett Real Estate which is also the northwest corner of the Penrose Real Estate. Said points are 0.90 of a foot apart, due to the fact that there is 0.90 of a foot surplus ground between the east line of Walnut Street and the West Line of Lincoln Street. Therefore a measurement from the west, and a measurement from the east leaves a distance of 0.90 of a foot between the two parcels of real estate. I suggest a compromise.

Helpers and witnesses were Daniel T. Stapleton and John Lysher

*John T. Stapleton*  
Monroe County Surveyor

August 21, 1948

Pursuant to notice as required by law, and as required by Petition of Howard Walker and Virginia Walker, requesting me to establish, locate and perpetuate the East line of the following described real estate situated in Monroe County, in the State of Indiana, to-wit:

A part of the Northeast Quarter of the Northwest Quarter of Section 5, Township 8 North, Range 1 East, described as follows, to-wit:

Beginning at the northeast corner of said quarter quarter section and running thence west along the section line one rod; thence south to the public highway known as State Highway Number 46; thence east along the north line of said Highway to the east line of said quarter quarter section; thence north along the said east line of said quarter quarter section to the place of beginning.

I proceeded to make all necessary surveys to locate said line. I located the corner stone at the northwest corner of said section 5, township 8 North; Range 1 East, also the corner stone at the southwest corner of section 32 township 9 North; Range 1 East in said County and State.

I surveyed the west half of said section 5 over and along the north line thereof, and found that said section is a fractional section, and that the west half over and along the north line is 2612½ feet in length. I also found a stone located in the north line of said section 5 marking the center line of said section 5, which stone is located twenty-six hundred and twelve and one half (2612½) feet east of the Northwest corner of said section 5. I find that said last described stone in the center section stone on the north line of said section 5.

The distance of 2640 feet from the stone at the north west corner of said section 5, which distance constitutes a full half mile or a full half section would over lap the stone in the center of said section 5 by 27½ feet to the east and would make the center line of said section 5 running through Floyd Hall's residence, therefore I hereby declare the west half of section 5 in Salt Creek Township to be short and establish the stone located 2612½ feet east of the stone at the northwest corner of said section 5 to be the center line of said section 5 and the northeast corner of the real estate described above.

*John T. Sigphlat*  
Surveyor of Monroe County  
State of Indiana.



SURVEYS

PLANS AND SPECIFICATIONS


JOHN T. STAPLETON  
CIVIL ENGINEER1309 EAST 2ND STREET  
BLOOMINGTON, INDIANA  
TELEPHONE 2928

October 8, 1948

Copy: -of notice to  
Grace Flick  
Raymond Sare

In accordance with the legal notice given to Grace Flick and served by the Sheriff of Monroe County, Indiana on the 26th day of September, 1948 and on the request of Raymond Sare, I hereby notify you that on October 23, 1948 and on or about the hour of 9:30 A.M. I will arrive on the premises of lot number 191 in Driscoll Addition to the City of Bloomington, Indiana for the purpose of making a field survey of said Lot 191.

In the case of inclement weather or for any other reason or reasons that this survey cannot be made on the date given above, another notice shall be given by me, which will set another future date for making this survey.

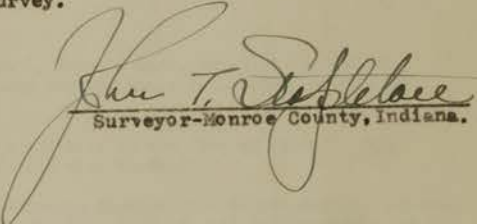  
 Surveyor - Monroe County, Indiana.

FORWARDED

10/8/48



NOTED BY DEPT. OF REVENUE, 10/10/48


Noble Seiscoe, Sheriff of  
Monroe County

State of Indiana  
ss:  
County of Monroe

Request for a Legal Survey  
By Raymond Sare

TO: Grace Flick  
535 E. Southern Drive  
Bloomington, Indiana


You are hereby notified that I, Raymond Sare, owner of the following described real estate in Monroe County, State of Indiana, as follows, to-wit:

Lot Number 191 in Driscoll's Addition to the City of Bloomington, as shown by the recorded plat thereof.


have hereby made a request to the County Surveyor for Monroe County, Indiana, that a legal survey be made along the East line of said lot, dividing Lot No. 191, owned by me as aforesaid, and Lot No. 190 in said Addition.

The County Surveyor has been requested to make a legal survey for the purpose of establishing the Southeast corner of Lot No. 191, the East line of Lot No. 191 and the Northeast corner of Lot No. 191.

You are further notified that such County Surveyor shall proceed to make the required survey and locations of lines.

  
Raymond Sare

I, Noble Sciscoe, Sheriff of Monroe County, have served the above and foregoing notice upon Grace Flick by reading said notice to Grace Flick and leaving a copy of said notice at the residence of said Grace Flick on this the 26<sup>th</sup> day of September, 1948.

  
Noble Sciscoe, Sheriff of  
Monroe County



PLAT ENTERED IN LEGAL  
SURVEY BOOK N9 3, PAGE 75.  
MONROE CO SURVEYOR'S OFFICE

12-10-80

1.15'

"D" 5' 89° 29' 18" E "E"


REBAR (1) 6.82 9.5 REBAR

135


P.O.B. N 89° 29' 37" W 420.75'  
from the SE corner of the W  
1/2 of the SW 1/4, Section 21,  
T-8-N, R-2-W, Monroe County

REFERENCE 4


REFERENCE "B"

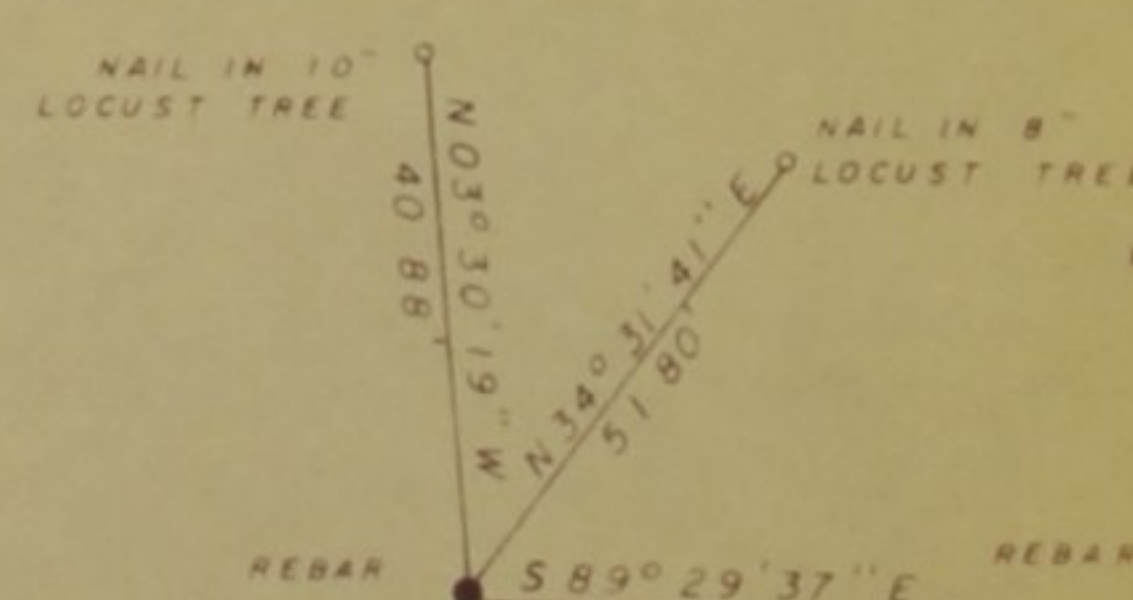


REFERENCE "C"

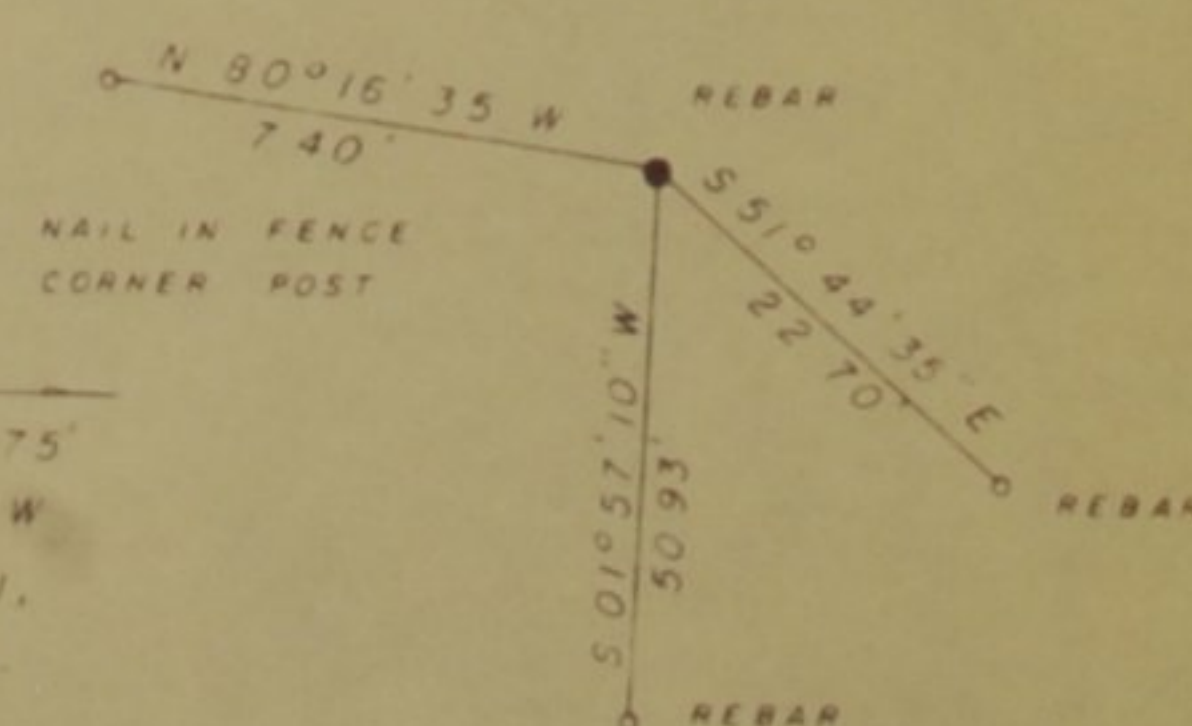

REFERENCE "D"

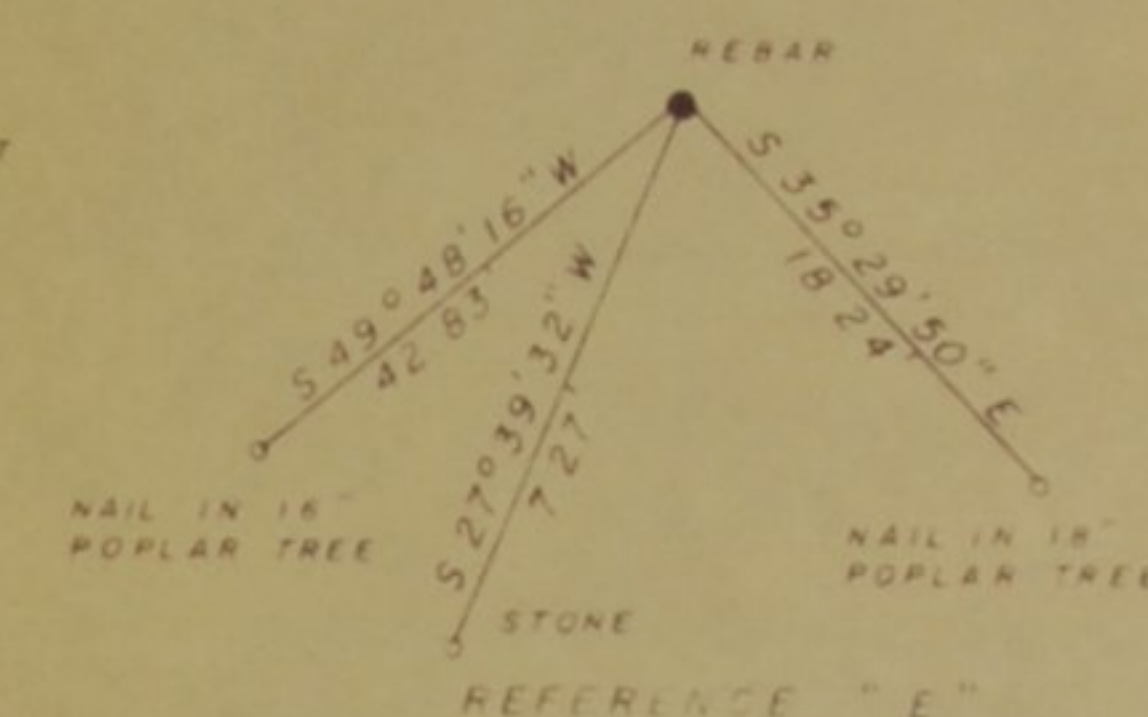

REFERENCE "H"

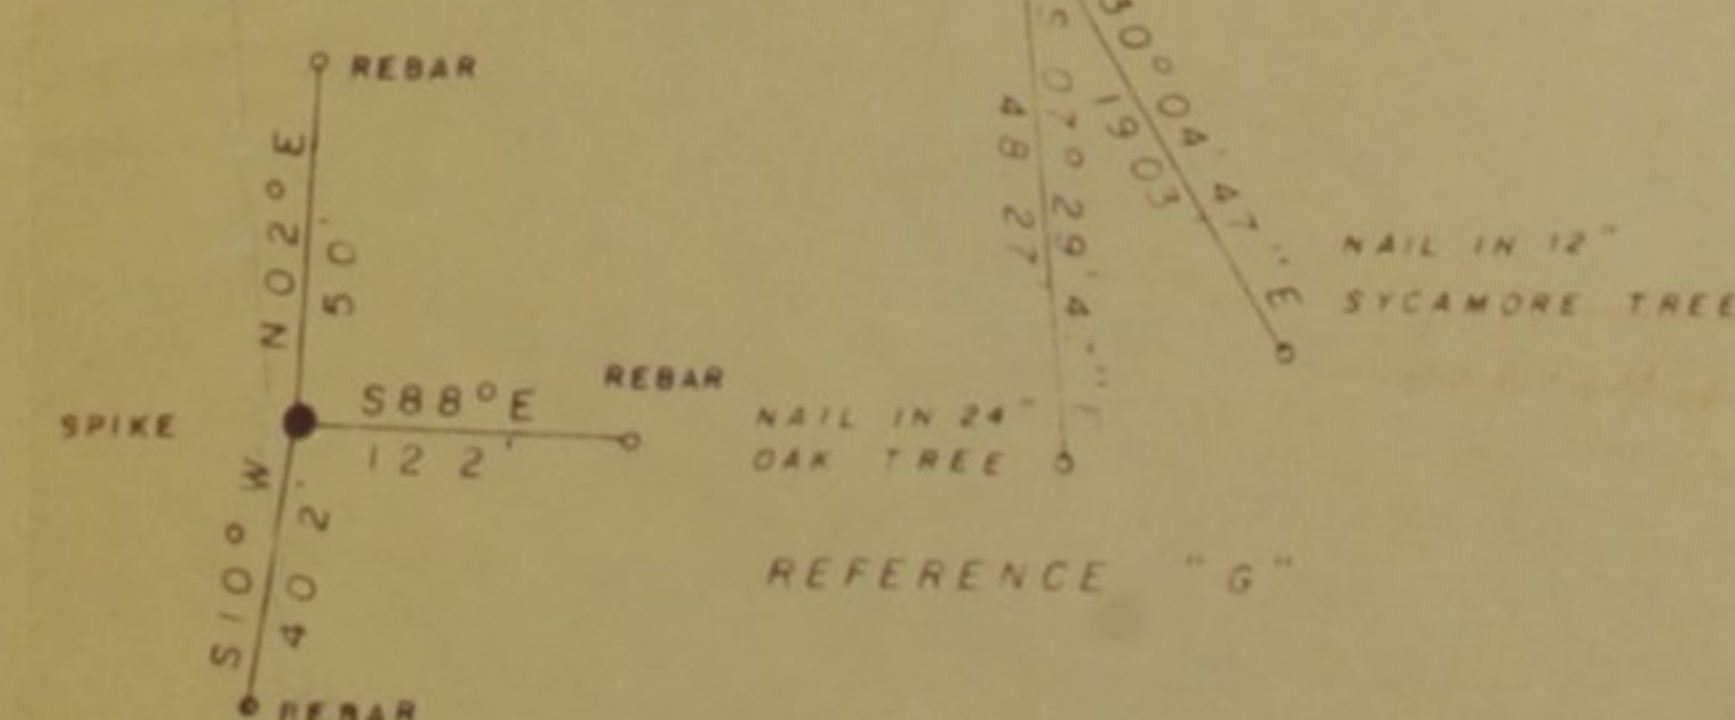

REFERENCE "G"

REFERENCE "1"

NOTE REFERENCE POINTS NOT  
DRAWN TO SCALE

SECTION 21  
(NOT TO SCALE)

I, Edmund O. Farkas hereby certify that I am a Registered Land Surveyor, licensed in compliance with the laws of the State of Indiana; that this plat correctly represents a land survey completed under my supervision on November 25, 1980; that all the monuments shown thereon actually exist; and that their location and type are to the best of my knowledge accurately shown.

Edmund O. Farkas  
Reg. Land Surveyor  
Ind. Reg. N° SO114

REVISIONS:

DRAWN BY S LAPHAM YODER

DATE \_\_\_\_\_

CHECKED BY

Ed. Jackson

LEGAL SURVEY  
ROBERT E. THRASHER


SCALE: 1" = 300'

PAGE 1 OF 1

TRI-CO SURVEYING & MAPPING  
PO BOX 96, ELLETTSVILLE, IND.



North west  $\frac{1}{4}$  of Sect 5  
 Town. 10 North Range 1 East

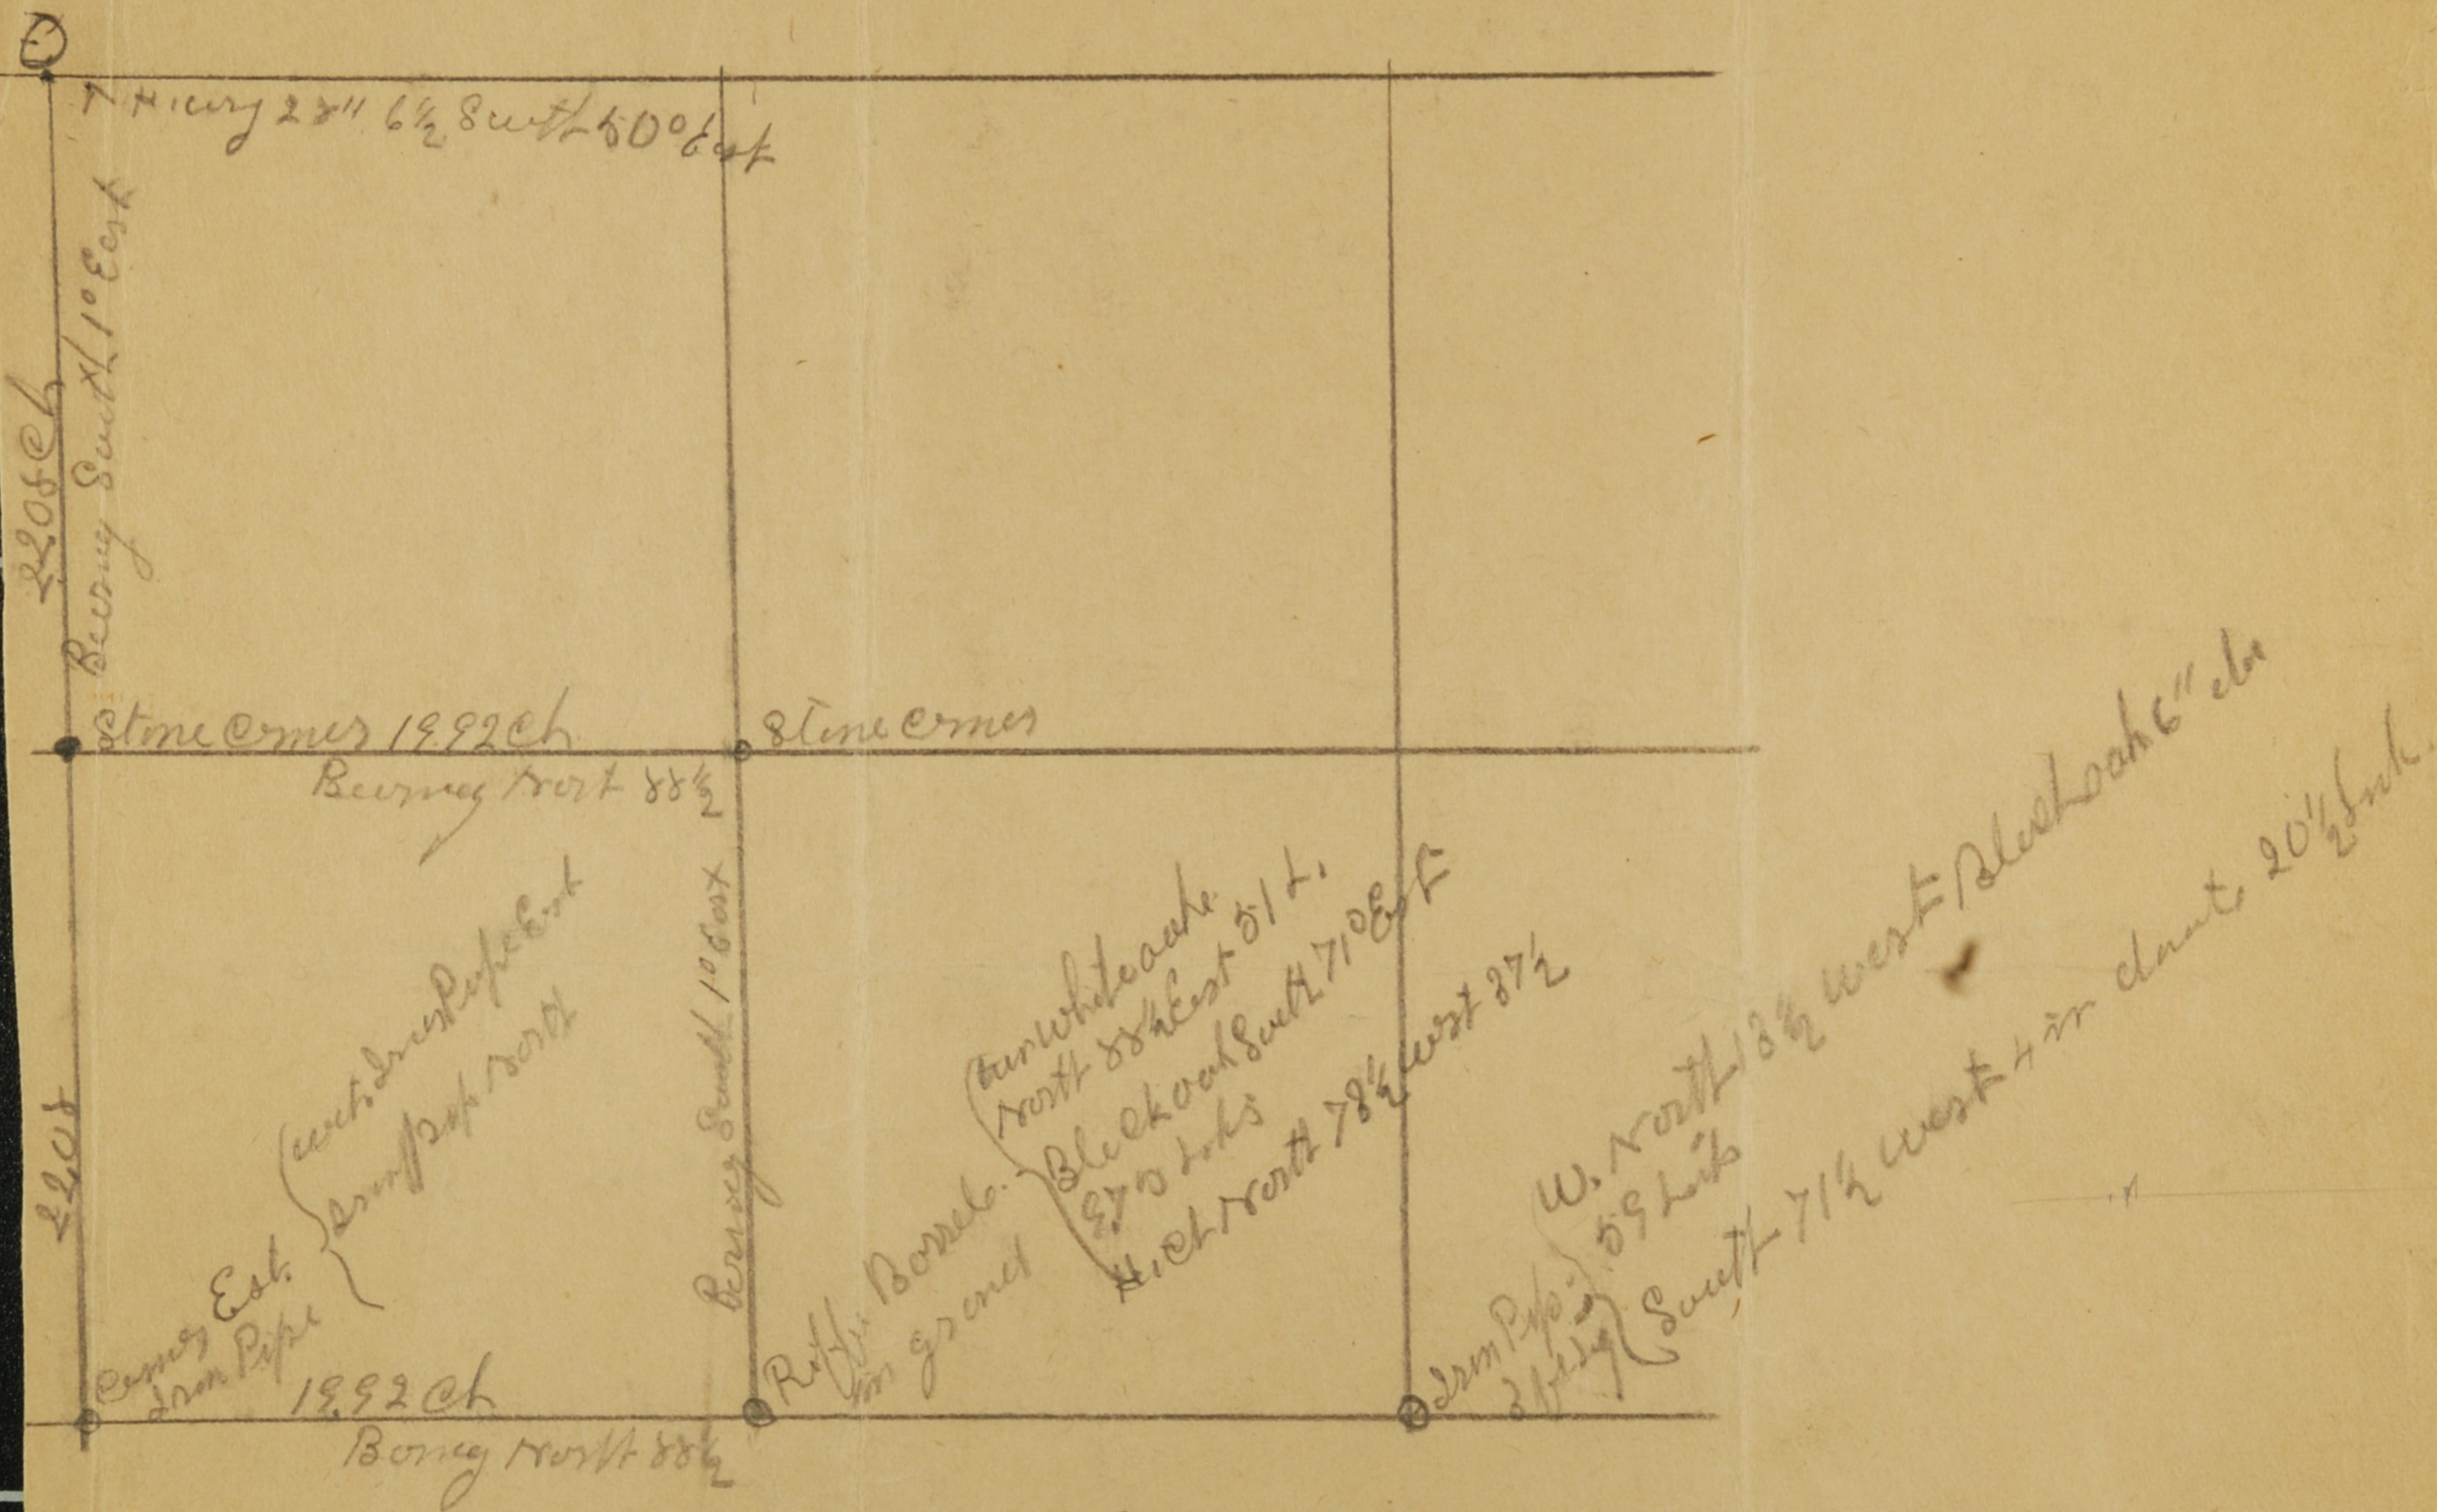

Frank Smith. Surveyor of M. C.